



Illinois State Water Survey

COOPERATING TECHNICAL PARTNERS (CTP)

FEMA-APPROVED FLOOD RISK PROJECTS (FRP)

MAPPING ACTIVITY STATEMENT (MAS)

FRP MAS No. ISWS 22-02

Fiscal Year 2022



FEMA

This page intentionally left blank

Table of Contents

Document Organization and Instructions.....	1
1. Part 1 – Custom Mapping Activity Statement (MAS) Information	2
1.1. Project and Point of Contact Information.....	2
1.2. Identify Tasks and Deliverables to be Completed Under this MAS.....	6
1.2.1. Project Tasks and Deliverables.....	6
Task 1 – Project Management and Earned Value Data Entry.....	8
Task 2 – Discovery Data Capture.....	9
Task 3 – Event Data Capture.....	10
Task 4 – Project Outreach and Communication Plan	12
Task 5 – Flood Risk Products Data Capture.....	14
Task 6 – Independent QA/QC of Flood Risk Products.....	15
Task 7 – Survey Data Capture	17
Task 8 – Existing or New Topographic Data Capture and Terrain Data Capture.....	18
Task 9 – Independent QA/QC: Topographic Data Capture.....	20
Task 10 – Base Map Data Capture.....	21
Task 11 – Independent QA/QC: Base Map Data Capture.....	23
Task 12 – Hydrology Data Capture	24
Task 13 – Independent QA/QC: Hydrology Data Capture	26
Task 14 – Hydraulics Data Capture	27
Task 15 – Independent QA/QC: Hydraulics Data Capture	29
Task 16 – Coastal Data Capture.....	30
Task 17 – Independent QA/QC: Coastal Data Capture	33
Task 18 – Floodplain Mapping Data Capture	34
Task 19 – Independent QA/QC: Floodplain Mapping Data Capture.....	36
Task 20 – Draft FIRM Database Capture.....	37
Task 21 – Produce Preliminary Map Products.....	39
Task 22 – Independent QA/QC: Produce Preliminary Map Products.....	40
Task 23 – Distribute Preliminary Map Products.....	41
Task 24 – Post-Preliminary Map Production.....	42
1.2.2. Additional Levee Summary Table.....	43
1.3. Performance and Risk Identification (Required).....	43
1.3.1. Performance	43
1.3.2. Risk Identification And Mitigation	45
1.4. Project Management	45
1.5. Standards	47

1.6.	Use of Contractors	49
1.7.	Reporting and Performance.....	49
1.8.	Privacy and Protection of Personally Identifiable Information	50
1.9.	Technical and Administrative Support Data Submittal.....	50
1.10.	Certifications.....	53
1.10.1.	Data Capture	53
1.10.2.	Perform Field Surveys and Develop Topographic Data.....	54
1.10.3.	Prepare Base Map	54
1.10.4.	Develop Hydrologic Data, Develop Hydraulic Data, Perform Coastal Analysis, and Perform Floodplain Mapping	54
1.11.	Technical Assistance and Resources.....	54
2.	Part 2 – Available FRP Scope Activities	56
2.1.	Earned Value Data Entry.....	56
2.2.	Discovery Data Capture	57
2.2.1.	Stakeholder engagement	58
2.2.2.	Data and Information Collection.....	58
2.2.3.	Data Information Analysis.....	59
2.2.4.	Discovery meeting	59
2.2.5.	Post-Discovery	60
2.2.6.	Scope Refinement	61
2.3.	Event Data Capture.....	61
2.3.1.	Risk Communication and Outreach	61
2.3.2.	Advancing Mitigation Action.....	62
2.3.3.	Watershed and Community ASsessment.....	62
2.3.4.	Action Identification, Planning, and Assessment.....	63
2.3.5.	30-Day Review of Proposed Models	63
2.3.6.	30-Day Review of Completed Models, Work Maps, and Database.....	63
2.3.7.	Television and Radio Outreach	64
2.3.8.	Meetings.....	64
2.3.9.	Status Reports.....	68
2.4.	Project Outreach and Communication Plan (POCP).....	69
2.5.	Flood Risk Products Data Capture.....	69
2.6.	Independent QA/QC of Flood Risk Products.....	70
2.7.	Survey Data Capture.....	70

2.8.	Existing or New Topographic Data Capture and Terrain Data Capture.....	71
2.9.	Independent QA/QC: Topographic Data Capture.....	73
2.10.	Base Map Data Capture	73
2.11.	Independent QA/QC: Base Map Data Capture	74
2.12.	Hydrology Data Capture	74
2.13.	Independent QA/QC: Hydrology Data Capture.....	75
2.14.	Hydraulics Data Capture	76
2.15.	Independent QA/QC: Hydraulics Data Capture.....	79
2.16.	Coastal Data Capture.....	80
2.17.	Independent QA/QC: Coastal Data Capture.....	82
2.18.	Floodplain Mapping Data Capture	82
2.19.	Independent QA/QC: Floodplain Mapping Data Capture.....	83
2.20.	Draft FIRM Database Capture.....	84
2.21.	Produce Preliminary Map Products	85
2.22.	Independent QA/QC: Produce Preliminary Map Products	85
2.23.	Distribute Preliminary Map Products	86
2.24.	Post-Preliminary Map Production.....	87
	Authorized Representative Signatures	91
	List of Tables.....	92
	Acronyms	93

Document Organization and Instructions

DISCLAIMER (DO NOT DELETE): *In recognition of the MIP Studies Redesign which was deployed in June 2017, FEMA Region 5 has made an effort to update the accompanying R5 MIP Workbook to align with terminology, projects, purchases and tasks in the redesigned MIP. The Region acknowledges that the signed MAS or SOW may or may not contain the required sections, tables, scope or terminology that is fully aligned with the R5 MIP Workbook. Due to these reasons, the R5 MIP Workbook will be treated as the sole source for creating and obligating projects, purchases and tasks in the redesigned MIP, and must be completed by the CTP.*

This document is organized into two parts to simplify and streamline the Mapping Activity Statement (MAS) completion process and improve the usability of the MAS for both the Cooperating Technical Partner (CTP) and Federal Emergency Management Agency (FEMA).

Part 1 provides areas for the CTP to detail custom MAS elements (formatted in tables), along with required elements which cannot be modified by individual CTPs:

- Part 1.1 – 1.3. These sections are where the CTP will provide a narrative on the project and identify the scope elements to be completed under this MAS. Opportunities to clarify or modify the standard descriptions and deliverables on fundable activities (as shown in Part 2) are provided. Additionally, the CTP will indicate the schedule for delivery, leverage, budget, performance measures, etc.
- Part 1.4 – Part 1.11. These sections include standard language the CTP is agreeing to, around standards, use of contractors, reporting and performance, and privacy and protection of personally identifiable information. No inputs or edits may be required by the CTP.

Part 2 of this document provides standard language on available fundable scope activities. If the CTP indicates in Part 1 that they are applying for an individual fundable activity, the CTP is agreeing to scope as written in Part 2 under that subsection unless otherwise noted in Part 1. CTPs have the opportunity to customize this language (by note/deliverable additions, subtractions, etc.) after each scope element in the “Custom Scope Elements.” If the text is accepted as-is, there is no need to copy text from Part 2 into Part 1, it is incorporated by reference.

1. Part 1 – Custom Mapping Activity Statement (MAS) Information

In accordance with the CTP Partnership Agreement referenced in *Table 1* between **Illinois State Water Survey** (herein referred to as “CTP”) and the Federal Emergency Management Agency (FEMA), FEMA-Approved National Flood Risk Projects (FRP) MAS No. **ISWS 22-02** is as follows:

1.1. Project and Point of Contact Information

Instructions: Complete *Table 1* below with the basic project information and point of contact information for both the CTP and FEMA staff.

Table 1. Project and Point of Contact Information

Information Type	Insert Information
CTP Organization Name:	Illinois State Water Survey
CTP Contractor Working on the activities in this MAS: <i>Optional, only if contractors have already been identified. Please see Part 1.6 for more information</i>	NA
CTP Partnership Agreement Date:	September 9, 2013
Period of Performance:	09/01/2022 to 09/30/2025
CTP Project Manager:	Glenn Heistand
FEMA Regional Project Officer (PO): <i>When necessary, additional FEMA assistance should be requested through the FEMA Regional PO</i>	John Wethington
FEMA Funding to Complete this FRP MAS:	\$295,000
CTP Estimated Leverage: <i>Leverage dollars or units will be entered throughout the project lifecycle within most purchases, including Discovery, all data development types, preliminary, due process, outreach, and final mapping. Leverage entries should follow the Estimating the Value of Partner Contributions to Flood Mapping Projects “Blue Book” (Blue Book)</i>	NA

Information Type	Insert Information
Project Team Coordination Activities: <i>Throughout the project, all members of the Project Team will coordinate, as needed, to ensure that activities, products, and deliverables meet FEMA requirements and contain accurate, up-to-date information</i>	Meetings, teleconferences, and video conferences with FEMA and other Project Team members Monthly Telephone conversations with FEMA and other Project Team members on a scheduled Monthly basis and as needed basis, as required Email as needed As Necessary

Instructions: Complete Table 2 below with a high-level narrative of the work to be accomplished under this COMS SOW, as well as the intended audience of the project.

Table 2. Narrative and Audience

Information Type	Insert Information
MAS Narrative:	Bond County, IL Countywide Digital Mapping Project QR2 thru Effective; including Flood Risk Products
Intended Audience:	Bond County, IL Unincorporated Areas and incorporated communities: City of Greenville, and the Villages of Donnellson, Keyesport, Mulberry Grove, Old Ripley, Panama, Pierron, Pocahontas, Smithboro, Sorento, herein referred to as “community(ies)”

Instructions: Each FRP will have its own corresponding MAS. The watershed and jurisdictions in which FRP will be performed, as well as its applicable project type/activities, are summarized in Table 3. *Flood Risk Project Watershed and Jurisdictions*. The project type should be identified in the table below (e.g., Data Investments (2D BLE), Pre-Discovery, Discovery with BLE, Data Development, Produce Preliminary Map Products, Distribute Preliminary Map Products, Post-Preliminary Processing/Due Process, or Other (with description). Watershed Reports will be created and distributed to counties and communities identified as including Discovery in the Project Type.

Additionally, funding information is required per watershed/project. Please indicate the leverage for the watershed/project as follows:

- **A - FEMA Contribution.** This is the funding FEMA is providing to the CTP for the completion of this FRP MAS.
- **B - Partner Contribution.** Indicate the additional resources required that the CTP will provide to complete the assigned activities for this FRP MAS (also known as **Leverage**). Values shall be based on Blue Book values or actual costs where Blue Book values do not exist. The current Blue

Book is dated April 2017 and can be downloaded from FEMA's Information Resource Library at https://www.fema.gov/sites/default/files/documents/fema_risk-map_blue-book_2017.pdf.

- **A+B – Total Project Cost.** The sum of the above two quantities.

Table 3. Flood Risk Project Watershed and Jurisdictions

Watershed/ Project Name	Geographic Footprint	Counties/ Parishes and Communities Included in Project	Project Type	(A) FEMA Cont. (\$)	(B) Partner Cont. (\$)	(A + B) Total Project Cost (\$)
Bond County, IL Countywide digital FIRM	Bond County, IL	Bond County (Unincorporated Areas), City of Greenville, and the Villages of Donnellson, Keyesport, Mulberry Grove, Old Ripley, Panama, Pierron, Pocahontas, Smithboro, Sorento,	Produce Preliminary Map Products, Distribute Preliminary Map Products, Post- Preliminary Processing Due Process, Final Map Production & Distribution, and Flood Risk Products & Datasets	\$295,000	\$0	\$295,000

Additionally, the CTP involved in this project will develop new and/or updated flood hazard data as summarized in *Table 4. Total Stream or Shoreline Mile, or 2D Square Mile Counts by Type of Study*. The FIRM and FIS report for the watersheds and areas identified in *Table 4* will be produced in the North American Vertical Datum of 1988 (NAVD88).

Table 4. Total Stream or Shoreline Mile, or 2D Square Mile Counts by Type of Study

Watershed						
Jurisdiction						
Effective Flood	Coastal miles					

Watershed							
Insurance Study (CNMS)	Riverine miles						
	Total Miles						
	Unverified miles ¹						
	Unmapped miles ¹ (expansion)						
Updated Effective Studies (miles)*Identify if miles are planned 1D or 2D	New Approx.						
	New Detailed						
	New Coastal						
	New BLE (not planned for FIRM)						
	Leveraged Approx.						
	Leveraged Detailed						
New Studies/ Unmapped (miles)*Identify if miles are planned 1D or 2D	New Approx.						
	New Detailed						
	New BLE (not planned for FIRM)						
	Leveraged Approx.						
	Leveraged Detailed						

¹ CNMS Miles within project footprint that will be updated based on this project. This does not include miles that will not be updated in the project.

Watershed						
Total of all miles to be studied						

To complement Table 1.1.3, the CTP will deliver a GIS shapefile indicating streamlines and study method (with reach ID's as indicated in CNMS) for all mapping activities in this MAS, prior to the MAS becoming final.

1.2. Identify Tasks and Deliverables to be Completed Under this MAS

CTP must indicate deliverable details below for activities that are applicable. CTP will also use the R5 MIP Workbook to indicate associated MIP task, grant, cost and schedule details.

1.2.1. PROJECT TASKS AND DELIVERABLES

Instructions: Tasks and deliverables that can be accomplished under this FRP MAS are in the tables in Part 1.2.1 below. Please fill out the table for each task by checking the box of the deliverables to be completed and add a description of the custom scope elements for each relevant task.

The following twenty-four tasks can be accomplished under this FRP MAS:

1. Earned Value Data Entry
2. Discovery Data Capture
3. Event Data Capture
4. Project Outreach and Communication Plan (POCP)
5. Flood Risk Products Data Capture
6. Independent QA/QC of Flood Risk Products
7. Survey Data Capture
8. Existing or New Topographic Data Capture and Terrain Data Capture
9. Independent QA/QC: Topographic Data Capture
10. Base Map Data Capture
11. Independent QA/QC: Base Map Data Capture
12. Hydrology Data Capture
13. Independent QA/QC: Hydrology Data Capture
14. Hydraulics Data Capture

- 15. Independent QA/QC: Hydraulics Data Capture
- 16. Coastal Data Capture
- 17. Independent QA/QC: Coastal Data Capture
- 18. Floodplain Mapping Data Capture
- 19. Independent QA/QC: Floodplain Mapping Data Capture
- 20. Draft FIRM Database Capture
- 21. Produce Preliminary Map Products
- 22. Independent QA/QC: Produce Preliminary Map Products
- 23. Distribute Preliminary Map Products
- 24. Post-Preliminary Map Production

These tasks and their associated deliverables are in listed in the sections below.

Task 1 – Project Management and Earned Value Data Entry

Instructions: Please fill out the required information in *Table 5* below.

The CTP shall deliver the checked item(s) to the FEMA Regional PO.

Table 5. Task 1 – Project Management and Earned Value Data Entry

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Monthly earned value data reporting through the MIP with variance explanations to support management of technical mapping activities within specified time frame, for both Regulatory and Flood Risk Products	☒
Management of Schedule Performance Index (SPI) and Cost Performance Index (CPI) for an organization	☒
Overall project Quality Management Plan (QMP) including Quality Assurance/Quality Control (QA/QC) maintenance information, by maintaining a QA/QC log and providing a QA/QC approach to FEMA for review and approval (<i>to be provided early in the grant lifecycle</i>)	☐
Management of adherence to scope of work and quality of work for an organization	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.1. Earned Value Data Entry unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. Only provide additional details here on what you plan to modify. {enter custom scope elements}	

Task 2 – Discovery Data Capture

Instructions: Please fill out the required information in *Table 6* below.

Table 6. Task 2 – Discovery Data Capture

Deliverable	Mark "X" if deliverable will be done under this task {Insert Watershed Name}
Stakeholder Engagement	☐
Data and Information Collection	☐
Discovery Meeting	☐
Post Discovery Meeting	☐
Scope Refinement	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.2. Discovery Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add the specifics regarding the specific tasks to be completed in this activity in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 3 – Event Data Capture

Instructions: Please fill out the required information in *Table 7* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. All sections in [Part 2.3](#) (including 2.4.1-2.4.9) are expected to be completed for this project for the watersheds identified. Deliverables include submitting each of the above per the [Data Capture Technical Reference](#) (November 2021), page 43-44.

Table 7. Task 3 – Event Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Risk Communication and Outreach	☒
Advancing Mitigation Action	☐
Watershed and Community Assessment	☐
30-Day Review of Proposed Models	☐
30-Day Review of Completed Models, Work Maps, and Database	☐
Television and Radio Outreach	☐
Discovery Meeting(s)	☐
Project Initiation/Coordination Calls	☐
Flood Risk Review Meeting(s)	☐
Resilience Meeting(s)	☐
Final CCO Meeting(s)	☒
Status Reports	☐
Other: Public Flood Risk Open House	☒

Mark "X" if deliverable will be done under this task

Custom Scope Elements

Note, you are agreeing to the scope as written in [Part 2.3. Event Data Capture](#) unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add the specifics regarding the tasks that were selected to be completed in this activity in this section.

{start and end dates to this task can be found in R5 MIP Workbook}

{enter custom scope elements}

Task 4 – Project Outreach and Communication Plan

Instructions: Please fill out the required information in *Table 8* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables.

Table 8. Task 4 – Project Outreach and Communication Plan

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
A Project Communication Plan detailing outreach and coordination activities (Required unless part of a COMS overarching Outreach plan). NOTE: The MIP has tasks available to capture outreach activities. Upon completion of these tasks, upload relevant data to those tasks in the MIP ^{2,3}	☒
Watershed/Community Assessment outputs, including logs of telephone discussions	☐
Meeting invitation, format (in-person, virtual, hybrid), agenda, presentation slides (as requested), and meeting notes for FEMA review	☒
Action Identification and Advancement Plan	☐
Project update status reports for project communities	☐
Provide documentation of adherence with the requirements for the community 30-day review of proposed models and 30-day review of work maps, completed models, and associated information	☐
Other: {Insert additional details}	☐

² All products should be uploaded to the MIP (or submitted to MIP Help on a hard drive if they are over the size listed in the MIP Guidance document)

³ The FEMA Flood Risk Communication Toolkit for Community Officials: communication Plan Guide can be found at: <https://www.fema.gov/sites/default/files/2020-10/communication-plan-guide.pdf>

Custom Scope Elements

Note, you are agreeing to the scope as written in [Part 2.4. Project Outreach and Communication Plan](#) unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add the specifics regarding the specific tasks that will be completed in this activity in this section.

{start and end dates to this task can be found in R5 MIP Workbook}

{enter custom scope elements}

Task 5 – Flood Risk Products Data Capture

Instructions: Please fill out the required information in *Table 9* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce products purchased for the specific geography referenced in *Table 41. Flood Risk Products*, for those communities identified in *Table 3*, listed in the Flood Risk Products Data Capture section within the most currently dated “[Data Capture Technical Reference](#)” (November 2021), made available to FEMA by uploading the digital data to the MIP.

Table 9. Task 5 – Flood Risk Products Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Changes Since Last FIRM (CSLF)	☐
Flood Depth and Analysis Grids (FDAG)	☐
Flood Risk Assessment (FRA)	☐
Flood Risk Database (FRD)	☒
Flood Risk Report (FRR)	☐
Flood Risk Map (FRM)	☐
Supplemental Data	☐
Other: AOMI	☐
Custom Scope Elements Note, you are agreeing to the scope as written in Part 2.5. Flood Risk Products Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add the specifics regarding the specific tasks that will be completed in this activity in this section. {start and end dates to this task can be found in R5 MIP Workbook} CSLF is paper to digital overlay	

Task 6 – Independent QA/QC of Flood Risk Products

Instructions: Please fill out the required information in *Table 10* below. The Mapping Partner shall produce items listed in the Flood Risk Products Data Capture section within the most currently dated “[Data Capture Technical Reference](#)” (November 2021), made available to FEMA by uploading the digital data to the MIP. The current MIP Guidance document includes a section for data upload methods and limitations. The guidance also explains how performance will be tracked for Flood Risk Products.

Deliverables should be submitted through to the FEMA Regional Office with coordination of the Region Service Center (RSC). The Mapping Partner is responsible for confirming and/or obtaining any revised or updated guidance from the region or FEMA RSC lead.

Data from flood hazard assessment will be coordinated with your FEMA Regional Point of Contact and submitted 60 days prior to release of this data to the general public.

Table 10. Task 6 – Independent QA/QC of Flood Risk Products

Mark “X” if deliverable will be done under this task	
Deliverable	{Insert Watershed Name}
Flood Risk Datasets (Changes Since Last FIRM, Flood Depth and Analysis Grids, Flood Risk Assessment)	☐
Flood Risk Products (Flood Risk Dataset, FRR, Flood Risk Map)	☒
Flood Depth and Analysis rasters and accompanying metadata file	☐
Project Narrative of assumptions made and approaches taken for analysis	☐
The Hazus system files (.hpr files)	☐
Global summary report	☐
Direct damage and contents data used to populate tables in FRR	☐
Updated local parcel/building information, topographic data, etc. used in analysis	☐
Description of data used that were not part of the default Hazus data sets	☐

Mark "X" if deliverable will be done under this task	
Quality Review (QR) checklist and any documents related to independent reviews of Flood Risk Products submittals	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.6. Independent QA/QC of Flood Risk Products unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. Only provide additional details here on what you plan to modify. {start and end dates to this task can be found in R5 MIP Workbook} All QA/QC items related to the Flood Risk Datasets contained within the Flood Risk Database will be submitted under the Flood Risk Products QA/QC task	

Task 7 – Survey Data Capture

Instructions: Please fill out the required information in *Table 11* below. The CTP shall produce items listed in the Survey Data Capture section within the most currently dated “[Data Capture Technical Reference](#)” (November 2021), made available to FEMA by uploading the digital data to the MIP. Where paper documentation is required by state law for professional certifications, the CTP may submit the paper in addition to a scanned version of the paper for the digital record. Please coordinate with the regional and/or state representative to verify state reporting requirements.

Table 11. Task 7 – Survey Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Photos	☐
Sketches	☐
Survey Data	☐
Supplemental Data	☐
As-built Data	☐
Spatial Files	☐
Other: {Insert additional details}	☐
Custom Scope Elements Note, you are agreeing to the scope as written in Part 2.7. Survey Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 8 – Existing or New Topographic Data Capture and Terrain Data Capture

Instructions: Please fill out the required information in *Table 12* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items listed in the New or Existing Topographic Data Capture section within the most currently dated “[Data Capture Technical Reference](#)” (November 2021), made available to FEMA by uploading the digital data to the MIP. Where paper documentation is required by state law for professional certifications, the CTP may submit the paper in addition to a scanned version of the paper for the digital record. Please coordinate with the regional and/or state representative to verify state reporting requirements.

Additionally, complete *Table 13. Summary of Topographic Elevation Data*.

Table 12. Task 8 – Existing or New Topographic Data Capture and Terrain Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Source	☐
Spatial Files	☐
Supplemental Data	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.8. Existing or New Topographic Data Capture and Terrain Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Table 13. Summary of Topographic Elevation Data

Watershed/ Flooding Source	Identify New OR Existing	Year Acquired	Data Type	Vertical Accuracy (RMSEz)	Source/Data Vendor (e.g. Public domain, community supplied, procured as part of this MAS, etc.)	Contact Information	Use Restrictions

Task 9 – Independent QA/QC: Topographic Data Capture

Instructions: Please fill out the required information in *Table 14* below. The responsible Mapping Partner(s) shall produce items listed in the New or Existing Topographic Data Capture section within the most currently dated “[Data Capture Technical Reference](#)” (November 2021), made available to FEMA by uploading the digital data to the MIP.

Table 14. Task 9 – Independent QA/QC: Topographic Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Quality Review (QR) checklist and any documents related to independent reviews of Topographic and Terrain data submittals	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.9. Independent QA/QC: Topographic Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. Only provide additional details here on what you plan to modify. {enter custom scope elements}	

Task 10 – Base Map Data Capture

Instructions: Please fill out the required information in *Table 15* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items listed in the Base Map Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](#), made available to FEMA by uploading the digital data to the MIP.

The CTP shall address all concerns and/or questions regarding the base map that are raised during the Independent QC review, or during the MIP Validate Content Submission Process. *Table 16* is useful if multiple counties are involved with this map update. Any additional base map information that is discovered after the MAS has been completed shall be recorded in a supplemental report delivered to the FEMA Region.

Table 15. Task 10 – Base Map Data Capture

Mark “X” if deliverable will be done under this task	
Deliverable	{Insert Watershed Name}
Spatial Files and Supplemental Data	☐
Other: {Insert additional details}	☐
Custom Scope Elements Note, you are agreeing to the scope as written in Part 2.10. Base Map Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Table 16. Summary of Planned Base Map (if known)

Data	New/ Existing	Leveraged	Study Area	Accuracy and Year Acquired	Source/ Data Vendor	Contact Information	Use Restrictions
Orthophotos/ Aerial Photographs							

Data	New/ Existing	Leveraged	Study Area	Accuracy and Year Acquired	Source/ Data Vendor	Contact Information	Use Restrictions
Hydrography							
Public Land Survey System							
Corporate Boundaries							
Transportation Features							
(Enter additional base map data as necessary)							
(Enter additional base map data as necessary)							
(Enter additional base map data as necessary)							

Task 11 – Independent QA/QC: Base Map Data Capture

Instructions: Please fill out the required information in *Table 17* below.

Table 17. Task 11 – Independent QA/QC: Base Map Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Quality Review (QR) checklist and any documents related to independent reviews of Base Map data submittals	☐
Any revised spatial files and supplemental data	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.11. Independent QA/QC: Base Map Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 12 – Hydrology Data Capture

Instructions: Please fill out the required information in *Table 18* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items listed in the Hydrology Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](#), made available to FEMA by uploading the digital data to the MIP. Where paper documentation is required by state law for professional certifications, the CTP may submit the paper in addition to a scanned version of the paper for the digital record. Please coordinate with the regional and/or state representative to verify state reporting requirements.

Additionally, complete *Table 19. Summary of Hydrologic Analyses*. Add additional rows as needed.

Table 18. Task 12 – Hydrology Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Spatial Files and Supplemental Data for the peak flood discharges and/or flood hydrographs for the 10, 4, 2, 1, “1- plus” and 0.2 percent annual chance events using the analysis method listed in <i>Table 19</i> .	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.12. Hydrology Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Table 19. Summary of Hydrologic Analyses

Study Area/Flooding Source	Methodology	Square Miles of Leveraged Hydrology	Square Miles of New Hydrology

Study Area/Flooding Source	Methodology	Square Miles of Leveraged Hydrology	Square Miles of New Hydrology

Task 13 – Independent QA/QC: Hydrology Data Capture

Instructions: Please fill out the required information in *Table 20* below. The responsible Mapping Partner(s) shall produce items listed in the Hydrology Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](#) made available to FEMA by uploading the digital data to the MIP. Additionally, the TSDN must be delivered in accordance with [Part 1.9. Technical and Administrative Support Data Submittal](#).

Table 20. Task 13 – Independent QA/QC: Hydrology Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Quality Review (QR) checklist and any documents related to independent reviews of Hydrology data submittals	☐
Other (for example, Summary Report documenting findings, or recommendations to resolve problems): {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.13. Independent QA/QC: Hydrology Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 14 – Hydraulics Data Capture

Instructions: Please fill out the required information in *Table 21* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items listed in the Hydraulics Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov/data-capture-technical-reference), made available to FEMA by uploading the digital data to the MIP.

Additionally, complete *Table 22. Summary of Hydraulic Analyses*.

Table 21. Task 14 – Hydraulics Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Simulations	☐
FIS Inserts and/or Profiles	☐
Floodway Data Tables (FWDT), Flood Hazard Data Tables	☐
Supplemental Data	☐
Spatial Files	☐
Base Level Engineering (BLE) (note, if checked here, also required under Part 2.20. Draft FIRM Database Capture)	☐
Other: {Insert additional details}	☐

Mark "X" if deliverable will be done under this task

Custom Scope Elements

Note, you are agreeing to the scope as written in [Part 2.14. Hydraulics Data Capture](#) unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section.

{start and end dates to this task can be found in R5 MIP Workbook}

{enter custom scope elements}

Table 22. Summary of Hydraulic Analyses

Study Area/Flooding Source	Hydraulic Analysis Option ⁴	Total Miles of New Base Level or Enhanced Level Hydraulics	Description of Level of study- i.e., AE with BFE or A zone mapping	Model Type(1D or 2D)

⁴ List option letters Table 42. Hydraulic Analysis Options for Base and Enhanced Level Engineering.

Task 15 – Independent QA/QC: Hydraulics Data Capture

Instructions: Please fill out the required information in *Table 23* below. The CTP shall produce items listed in the Hydraulics Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov/data-capture-technical-reference), made available to FEMA by uploading the digital data to the MIP. Where paper documentation is required by state law for professional certifications, the CTP may submit the paper in addition to a scanned version of the paper for the digital record. Please coordinate with the regional and/or state representative to verify state reporting requirements.

Table 23. Task 15 – Independent QA/QC: Hydraulics Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Quality Review (QR) checklist and any documents related to independent reviews of Hydraulic data submittals	☐
Revised data elements based on Quality review	☐
Other (for example, Summary Report documenting findings, or recommendations to resolve problems): {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.15. Independent QA/QC: Hydraulics Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 16 – Coastal Data Capture

Instructions: Please fill out the required information in *Table 24* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items listed in the Coastal Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at <https://www.fema.gov/media-collection/technical-references-flood-risk-analysis-and-mapping> made available to FEMA by uploading the digital data to the MIP. The Coastal data submittals shall follow an Intermediate Data Submittal organization as outlined below.

Additionally, complete *Table 25. Summary of Coastal Data*.

Atlantic, Gulf, and Great Lakes

- Intermediate Submission No. 1 – Scoping and Data Review
- Intermediate Submission No. 2 – Storm Surge Model Calibration, Validation, and Storm Selection
- Intermediate Submission No. 3 – Storm Surge Runs and Flood Frequency Analysis
- Intermediate Submission No. 4 – Nearshore Hydraulics and Overland Wave Calculations
- Intermediate Submission No. 5 – Draft Flood Hazard Mapping

Pacific

- Intermediate Submission No. 1 – Scoping and Data Review
- Intermediate Submission No. 2 – Offshore Water Levels and Waves
- Intermediate Submission No. 3 – Nearshore Hydraulics
- Intermediate Submission No. 4 – Draft Flood Hazard Mapping

Table 24. Task 16 – Coastal Data Capture

Deliverable	Mark "X" if deliverable will be done under this task {Insert Watershed Name}
Coastal_IDS_1 through Coastal_IDS_5 ⁵	☐
Stillwater Data	☐
Stillwater Analysis	☐
2D Hydro Modeling	☐
Wave Analysis	☐
Combined Riverine & Coastal Flooding	☐
Transect Based Wave Hazard Analysis	☐
Spatial Files	☐
Coastal Flood Risk Spatial Files	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.16. Coastal Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Table 25. Summary of Coastal Data

Study Area/Flooding Source	Methods (SWEL, setup, waves, runup)	Total Shoreline Miles of New Detailed Coastal Analysis

⁵ Note that for Pacific Coast regions there are only IDS 1 through 4

Study Area/Flooding Source	Methods (SWEL, setup, waves, runup)	Total Shoreline Miles of New Detailed Coastal Analysis

Task 17 – Independent QA/QC: Coastal Data Capture

Instructions: Please fill out the required information in *Table 26* below. The responsible Mapping Partner(s) shall produce items listed in the Coastal Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at <https://www.fema.gov/media-collection/technical-references-flood-risk-analysis-and-mapping>, made available to FEMA by uploading the digital data to the MIP.

Table 26. Task 17 – Independent QA/QC: Coastal Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Quality Review (QR) checklist and any documents related to independent reviews of Coastal data submittals	☐
Revised data elements based on Quality review	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.17. Independent QA/QC: Coastal Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 18 – Floodplain Mapping Data Capture

Instructions: Please fill out the required information in *Table 27* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items listed in the Floodplain Mapping Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov/data-capture-technical-reference), made available to FEMA by uploading the digital data to the MIP.

Additionally, complete *Table 28. Summary of Floodplain Mapping*.

Table 27. Task 18 – Floodplain Mapping Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
New or Revised Base Map (as needed to update what was provided under Task 11)	☐
Spatial Files	☐
Revised Topographic Data as needed, updated from Task 9	☐
Supplemental Data	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.18. Floodplain Mapping Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Table 28. Summary of Floodplain Mapping

Study Area/Flooding Source	Method	Mapping Type (A/AE)	Miles	Topographic Data Source (e.g. LIDAR)

Task 19 – Independent QA/QC: Floodplain Mapping Data Capture

Instructions: Please fill out the required information in *Table 29* below. The responsible Mapping Partner(s) shall produce the following checked items listed in the Floodplain Mapping Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov/data-capture-technical-reference), made available to FEMA by uploading the digital data to the MIP.

Table 29. Task 19 – Independent QA/QC: Floodplain Mapping Data Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
A Summary Report that describes the findings of the QA/QC review, noting any deficiencies in or agreeing with the mapping results	☐
Recommendations to resolve any problems that are identified during the independent QA/QC review	☐
An annotated work map with all questions and/or concerns indicated, if necessary	☐
Updated deliverables for previous tasks (if data changed during review)	☐
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.19. Independent QA/QC: Floodplain Mapping Data Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 20 – Draft FIRM Database Capture

Instructions: Please fill out the required information in *Table 30* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items listed in the Draft FIRM Database Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov/data-capture-technical-reference), made available to FEMA by uploading the digital data to the MIP.


Also, complete *Table 31. FIRM Panel Summary*.

Table 30. Task 20 – Draft FIRM Database Capture

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
FIRM Database Draft Metadata	☐
FIS Text Overflow for Principal Flood Problems and Special Considerations (if necessary)	☐
FIRM Database Files	☐
BLE (note, if checked here, also required under Part 2.14. Hydraulics Data Capture)	☐
Other: {Insert additional details}	☐
Custom Scope Elements Note, you are agreeing to the scope as written in Part 2.20. Draft FIRM Database Capture unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Table 31. FIRM Panel Summary

Watershed/Area of Study	County/Communities	Number of Revised Panels
Bond County, IL	Bond County, IL Countywide DFIRM	31 proposed FIRM panels

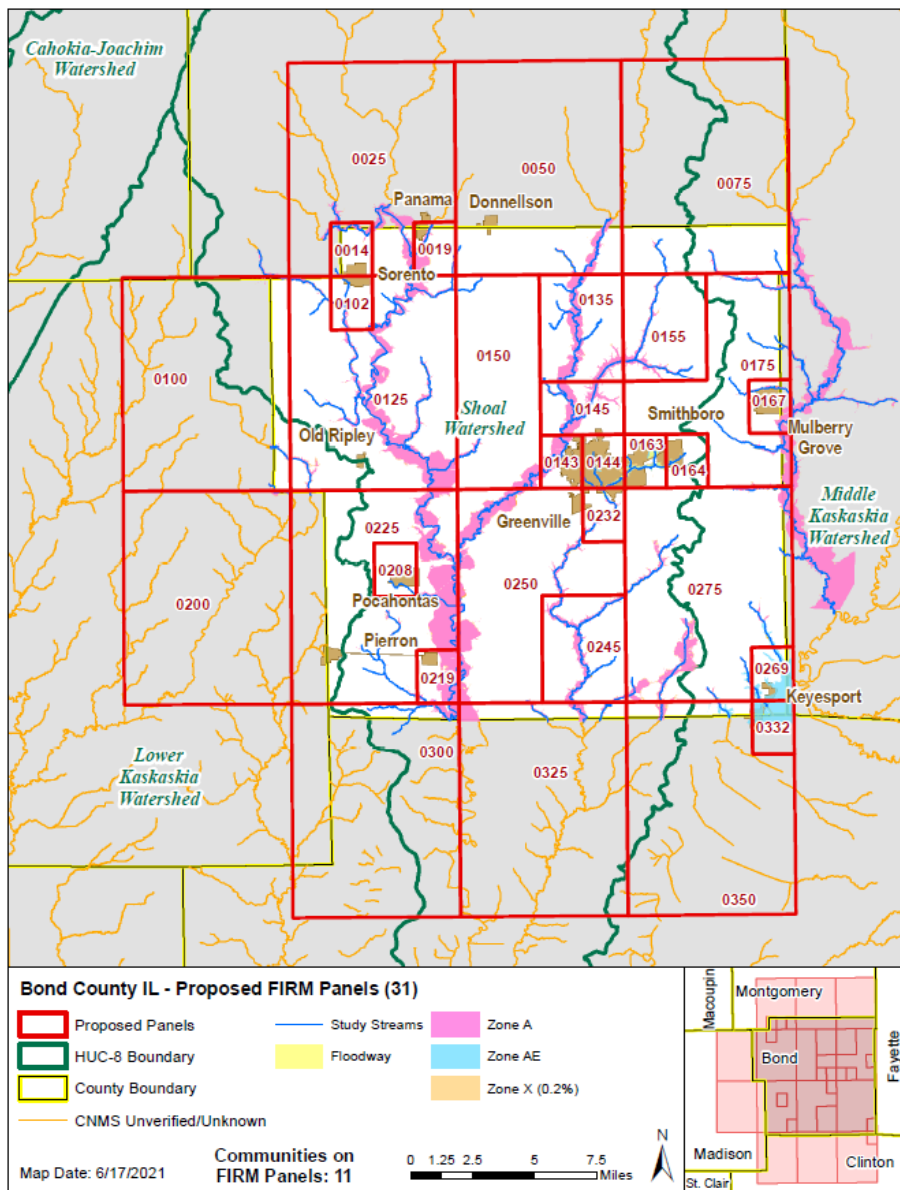

Task 21 – Produce Preliminary Map Products

Instructions: Please fill out the required information in *Table 32* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items the below checked items, which are listed in the Produce Preliminary Products Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov), made available to FEMA by uploading the digital data to the MIP

Table 32. Task 21 – Produce Preliminary Map Products

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
FIRM Database Preliminary Metadata	☒
FIRM Database Files	☒
Complete set of Preliminary FIRM panels showing all detailed flood hazard information at a suitable scale as developed by FEMA’s Automated Map Production (AMP) tool	☒
FIS Report	☒
Preliminary or Revised Preliminary Issuance Letters	☒
Preliminary Summary of Map Actions (SOMAs) prepared using the SOMA Tool on the MIP	☒
Pre-and Post-Quality Review (QR)3 Documentation	☒
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.21. Produce Preliminary Map Products unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 22 – Independent QA/QC: Produce Preliminary Map Products

Instructions: Please fill out the required information in *Table 33* below. The responsible Mapping Partner(s) shall produce items listed in the Produce Preliminary Products Data Capture section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](#), made available to FEMA by uploading the digital data to the MIP.

Table 33. Task 22 – Independent QA/QC: Produce Preliminary Map Products

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Quality Review (QR) checklist and any documents related to independent reviews of Preliminary Map Product submittals	☒
Revised data elements based on Quality review	☒
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.22. Independent QA/QC: Produce Preliminary Map Products unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 23 – Distribute Preliminary Map Products

Instructions: Please fill out the required information in *Table 34* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables. The CTP shall produce items listed in the Distribute Preliminary Products section within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov/data-capture-technical-reference), made available to FEMA by uploading the digital data to the MIP.

Table 34. Task 23 – Distribute Preliminary Map Products

Deliverable	Mark “X” if deliverable will be done under this task {Insert Watershed Name}
Distribute Preliminary Products receipts	☒
Other: {Insert additional details}	☐
Custom Scope Elements	
Note, you are agreeing to the scope as written in Part 2.23. Distribute Preliminary Map Products unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section. {start and end dates to this task can be found in R5 MIP Workbook} {enter custom scope elements}	

Task 24 – Post-Preliminary Map Production

Instructions: Please fill out the required information in *Table 35* below. In the custom scope elements cell, include start and end dates for this task, and include justification of omission of this task and/or specific deliverables.

The CTP shall produce items listed in the CCO Meeting Data Capture, Feedback Data Capture, Due Process, and Final Map Production and Distribution Products Data Capture sections, within the most currently dated “Data Capture Technical Reference” document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov/data-capture-technical-reference), made available to FEMA by uploading the digital data to the MIP.

The deliverables shall include items listed in CCO Meeting Data Capture, Feedback Data Capture, Due Process, and Final Map Production and Distribution Products Data Capture.

Table 35. Task 24 – Post-Preliminary Map Production

Deliverable	Mark “X” if deliverable will be done under this task
	{Insert Watershed Name}
Consultation Coordination Officer (CCO) Meeting Data Capture (Task Documentation and Correspondence)	☒
Feedback Data Capture (Task Documentation, Correspondence, Feedback Type)	☒
Due Process (QR4 Checklist Part 1, QR4 Checklist Part 2, Task Documentation, Correspondence, Appeal Start Documentation, Affidavit/Receipt Documentation, Appeal/Comment Documentation)	☒
Final Map Production and Distribution Products Data Capture	☒
Other: {Insert additional details}	☐

Mark "X" if deliverable will be done under this task

Custom Scope Elements

Note, you are agreeing to the scope as written in [Part 2.24. Post-Preliminary Map Production](#) unless otherwise modified/noted in this cell. If you accept the text as-is, there is no need to copy the wording here. ENTER any additional deliverables planned to be developed above. And add any additional needed specifics regarding the deliverables above as needed in this section.

{start and end dates to this task can be found in R5 MIP Workbook}

{enter custom scope elements}

1.2.2. ADDITIONAL LEVEE SUMMARY TABLE

Please complete *Table 36. Levee System Data in Study Area* below. Example text of how this table may be filled out is shown in italics and can be deleted. It is for guidance only.

Table 36. Levee System Data in Study Area

NLD Levee System ID ⁶	NLD Levee System Name	Effective FIRM Status of Levee	Proposed Mapping Path Forward ⁷
<i>Example: 50000001</i>	<i>Example: Floodville Levee RB</i>	<i>Example: Accredited</i>	<i>Example: NA</i>
<i>1505000005</i>	<i>Lake Carlyle Levee</i>	<i>Non-accredited</i>	<i>Accredit</i>

1.3. Performance and Risk Identification (Required)

1.3.1. PERFORMANCE

The CTP must report performance of the grant in conjunction with the progress reporting. The performance of the CTP is measured by the following criteria. Quantitative Targets for performance measures will be defined using the 2022 CTP Performance Measures Matrix in conjunction with your FEMA Regional PO and defined in *Table 37. Performance Measures Targets*.

⁶ Data extracted from the NLD. May need Regional or RSC support to extract the Levee Mapping Issue data.

⁷ Mapping Path Forward must be coordinated with the FEMA Regional PO. All hydraulically significant non-accredited levees require Local Levee Partnership (LLPT) formation and appropriate level of engagement.

Instructions: Insert appropriate measures in table below based on the document “2022 CTP Performance Measures Matrix” and coordination with your FEMA Regional PO.

Table 37. Performance Measures Targets

Outcome ⁸	Output Measurement ⁹ (with customized Target)	Recorded Unit/Scale
	1.	
Advancement of program metrics and/or accomplishment of project performance measures, captured as Earned Value	Report on SPI and CPI. Must be between 0.92 and 1.08 . If it is not, provide information on what is being done to correct the problem.	SPI ratio (Budgeted Cost of Work Performed/ Budgeted Cost of Work Scheduled [planned]) CPI ratio (Budgeted Cost Work Performed/ Actual Cost Work Performed)
CTPs deliver high quality Engineering and Mapping deliverables	Quality Review 3 & 5 Recycle Rate: Achieve QR pass within two submittals	“Achieved” or “Not Achieved”
Attendance (CCO Meeting)	2.b.1 [75 %] of key stakeholders (<i>NFIP participating communities</i>) attended. {[#] of people attended (<i>from NFIP participating communities</i>) divided by [#] of people invited (<i>from NFIP participating communities</i>)} multiplied by 100	“Achieved” or “Not Achieved”
Improved Public Awareness and understanding of flood Risk	2.a.8. Risk MAP products will be provided to the appropriate entity (<i>MIP</i>) within [30 days] of final product (<i>LFD</i>)	“Achieved” or “Not Achieved”

⁸ An outcome is an observable and measurable change of knowledge, behavior, skills, and/or efficiency due to CTP project

⁹ An output is a direct, specific, & quantifiable product of CTP activities that lead to /indicate success of the intended outcome, expressed in units of measure that enable quantifiable recording of performance

1.3.2. RISK IDENTIFICATION AND MITIGATION

Risks to the planned completion of a project may come from various sources. Risks should be identified during the planning phase and monitored throughout the project, so that potential impact can be assessed, and solution strategies developed and implemented as needed.

Instructions: [Add risk, impact and solution strategy information in this paragraph and the table below, as necessary, including an Integrated Baseline Review for the project as required by the Regional Office.]

Table 38. Project Risk Identification and Mitigation

Project Risk	Potential Impact	Solution Strategy
Lake Carlyle Levee Accreditation delays	Schedule impact	Continue engagement started early in the project with USACE, RSC, FEMA R5 and the impacted communities to stay informed and engaged with the process.
Appeals	Schedule and budget impact	During data dev phase ISWS implemented SID 620 & 621, FRR meeting & comment period, and State review. Continue coordination with community FPMs and officials to maintain support for Preliminary products

1.4. Project Management

Project Management is the active process of planning, organizing, and managing resources toward the successful accomplishment of predefined project goals and objectives. The CTP will coordinate with the FEMA Regional Office with respect to Project Management activities and technical mapping activities.

The CTP will coordinate with FEMA, or its designee, to develop a baseline schedule for individual project activities. FEMA or its designee will utilize the individual project task schedule, create the FRP in the MIP, and baseline the project activities with schedule and cost information within 30 days of the funds being awarded and FEMA's approval of the final cost and schedule. The baseline schedule

for individual project activities may be re-baselined in the MIP with approval from the FEMA Regional PO, and does not require a change to this MAS unless the overall project end date is modified.

For projects being initiated following Discovery, the accompanying Discovery Database attributed with study scope (in DCS_S_Discovery_Map feature class), study watershed (in DCS_S_HUC feature class), and FIRM panels to be updated (in DCS_S_Prj_FirmPan feature class) is provided. In addition, the available Light Detection and Ranging (LiDAR) footprint is provided along with the Coordinated Needs Management Strategy (CNMS) database updated following Discovery.

The CTP shall notify FEMA and all applicable parties of all meetings with community officials, and other relevant meetings, between three and six weeks prior to the meeting (with as much notice as possible). These notifications will include intended audience and meeting type (in person, virtual, hybrid). FEMA and/or its contractor may or may not attend the community meetings.

The CTP shall maintain an archive of all data submitted. All supporting data must be retained for three years from the date a funding recipient submits its final expenditure report to FEMA. The CTP must demonstrate to FEMA compliance with Subpart 24.1 of the Federal Acquisition Regulation (FAR) related to the handling of Personally Identifiable Information (PII) associated with the Activities listed in this MAS.

The CTP is responsible for providing a Quality Management Plan (QMP) to include an independent QA/QC plan for all assigned activities. The CTP will submit a Summary Report that describes and provides the results of all automated or manual QA/QC review steps. The report should include the process for all assigned activities. The QMP is delivered directly to the FEMA Regions. Guidance to support quality management requirements and recommended approaches can be found in the [*Guidance for Flood Risk Analysis and Mapping: Quality Management for Flood Risk Projects*](#).

Independent QC review activities may be performed by the CTP or FEMA's contractor at the discretion of FEMA. If the CTP will be responsible for the QC review, the entity that will perform QC should be identified in this MAS. The CTP will need to submit its QC plan to the FEMA Regional PO for approval.

Please note FEMA will also be performing periodic audits and overall study/project management to promote quality, including National Quality Reviews (QRs) required per FEMA standards for all FRPs. Whether or not the CTP performs the Independent QC review mentioned in the preceding paragraph, the CTP will be responsible for addressing any and all comments resulting from National QRs and any additional independent QA reviews required by the FEMA Regional Office, including re-submittal of deliverables as needed to pass technical or quality review. The CTP will submit regulatory products to FEMA's designated National QR reviewer (for QR 1-8 reviews) for review and approval prior to public issuance. Metadata is required for certain activities.

FIRM-related tasks require a passing QC Report from FEMA's National FIRM database auto-validation tool, the Database Validation Tool (DVT) for QRs #1, #2, and #5 as required in FEMA standards. DVT can be found in the Mapping Information Platform (MIP) tasks that correspond to the

aforementioned QRs: Draft FIRM Database Capture, Produce Preliminary Products Data Capture, and Final Mapping Products Data Capture. Training materials for this step are available on MIP at MIP User Care Training Materials.

FEMA will provide download/upload capability for data submittals through the MIP located at <https://hazards.fema.gov>. As each activity is completed, the data must be submitted to the MIP by the CTP or other designee. After data is submitted, a Validation task must be completed. Note that FEMA's designee will be assigned this task, not the CTP.

The CTP assigned to the activity will respond to any comments generated as a result of the mandatory quality control checks by the Production and Technical Services (PTS) contractor. The PTS QC process is nationally funded and required on each non-PTS study.

In cooperation with the FEMA Regional PO, a Project Management Team (PMT) will be established by the CTP consisting of representatives from the CTP, FEMA's Regional Engineer, and other appropriate parties (e.g., FEMA contractors) at the discretion of FEMA. The PMT will be responsible for coordinating the activities identified in this MAS. The FEMA Region will be provided with documentation identifying the established PMT.

1.5. Standards

The standards relevant to this MAS are presented in FEMA Policy 204-078-1 *Standards for Flood Risk Analysis and Mapping, Revision 12*, dated November 2021 located on FEMA's website at <https://www.fema.gov/flood-maps/guidance-reports/guidelines-standards/standards-flood-risk-analysis-and-mapping-public-review>. This Policy supersedes all previous standards included in the *Guidelines and Specifications for Flood Hazard Mapping Partners*, including all related appendices and Procedure Memorandums. Additional information, along with links to guidance documents, technical references, templates, and other resources that support these standards, may be found on the FEMA Guidelines and Standards website at <https://www.fema.gov/guidelines-and-standards-flood-risk-analysis-and-mapping>. FEMA reviews standards on an annual basis and the most current version of the policy should be used.

For any studies with Floodplain Mapping Data Capture tasks, the CTP shall perform self-certification audits to confirm compliance with the required Floodplain Boundary Standards (FBS) for all flood hazard areas. All FIRM database work shall comply with applicable standards and requirements as specified in the FIRM Data Technical Reference and other related documents available at the FEMA Guidelines and Standards website: <http://www.fema.gov/guidelines-and-standards-flood-risk-analysis-and-mapping>. All studies must also pass the required automated and visual National Quality Reviews (QRs) prior to the distribution of preliminary or effective copies of the FIS Report, Summary of Map Actions (SOMA), letters, FIRM panels, or FIRM database. Additional information specifically related to coastal flood hazard analysis and mapping can be found at <https://www.fema.gov/coastal-flood-hazard-analysis-and-mapping>.

CTPs and their sub-awardees must comply with the regulations in Chapter 44 of the Code of Federal Regulations (CFR), specifically CFR Parts 65, 66 and 67, and the appropriate year CTP Notice of Funding Opportunity and Agreement Articles. CTPs shall also coordinate with their regional office to determine if any additional requirements must be met.

1.6. Use of Contractors

Check one applicable statement in *Table 39* below.

Table 39. Use of Contractors

Select One	Description of Contractor Options
☐	Contractor support may be used for all activities within this MAS, except staffing and mentoring, which must be completed by the CTP. The CTP intends to use the services of the contractor in <i>Table 1</i> for this MAS. The CTP shall ensure that the procurement for all contractors used for this Program Management Activity complies with the requirements of 2 CFR Part 200. Guidance provided in this part includes, but is not limited to, contract administration and record keeping, notification requirements, review procedures, competition, methods of procurement, and cost and pricing analysis. The 2 CFR 200 documents may be viewed online at http://www.ecfr.gov/cgi-bin/text-id?SID=cc011f4fb962e68cb0da4bc91e8fbb43&mc=true&node=pt2.1.200&rgn=div5. Additionally, contractors must not pose a conflict of interest issue.
☒	The CTP does not intend to use the services of a contractor for this SOW. No transfer of funds to agencies other than those identified in the approved cooperative agreement application shall be made without prior approval from FEMA. The CTP shall ensure that the procurement for all contractors, if any are used for this SOW, complies with the requirements of 2 CFR Part 200. Guidance provided in this part includes, but is not limited to, contract administration and recordkeeping, notification requirements, review procedures, competition, methods of procurement, and cost and pricing analysis. The 2 CFR 200 documents may be viewed online at http://www.ecfr.gov/cgi-bin/text-id?SID=cc011f4fb962e68cb0da4bc91e8fbb43&mc=true&node=pt2.1.200&rgn=div5. Additionally, contractors must not pose a conflict of interest issue.

1.7. Reporting and Performance

Financial Reporting: Because funding has been provided to the CTP by FEMA, financial reporting requirements for the CTP will be in accordance with the terms of the Cooperative Agreement Funding Opportunity Announcement, Articles of Agreement or Award Notice for this MAS. The CTP shall also refer to 2 CFR Part 200. The CTP shall provide financial reports to the FEMA Regional PO and Assistance Officer in accordance with the terms of the signed Cooperative Agreement for this MAS.

Performance Reporting: Recipients are responsible for providing a signed performance report using the required list of information shown in the Notice of Funding Opportunity (NOFO) (or an old SF-PPR if you prefer) on a quarterly basis throughout the period of performance, including partial calendar quarters as well as for periods where no grant award activity occurs. The CTP shall refer to 2 CFR

Part 200 to obtain minimum requirements for progress reporting. The FEMA Regional PO, as needed, may request additional information on progress.

The CTP may meet with FEMA and/or its contractor(s) as frequently as needed to review the progress of the project in addition to the quarterly financial and status submittals. These meetings may alternate between FEMA's Regional Office, the CTP office, and conference calls, as necessary.

The CTP shall communicate with communities throughout the life of each project. Continued engagement is necessary and appropriate and will build upon the relationships established or enhanced during Discovery and provide transparency into the Risk MAP process. This may occur through monthly or quarterly updates or project status calls with community leaders, project websites including updates at several milestones or along a specific timeline, or other methods.

1.8. Privacy and Protection of Personally Identifiable Information

Your organizational access to the MIP signifies that you have access to Personally Identifiable Information (PII). As such, please ensure your organization has coordinated with the region so that each user is meeting the requirements with the new Risk Analysis Management Access Request (RAMSAR) process.

Please contact your FEMA Regional PO for more information.

1.9. Technical and Administrative Support Data Submittal

The Project Team members for this Flood Risk Project that have responsibilities for activities included in this MAS shall comply with the data submittal requirements summarized below and in appropriate guidance.

All supporting documentation for the activities in this MAS shall be submitted according to FEMA standards and requirements and will include a Flood Elevation Determination Docket (FEDD) folder. Submittals must be made to the appropriate PTS for a review of required materials. The CTP will respond to requests from FEMA or its contractors for additional information and ensure that all required documents are included in the TSDN.

If any issues arise that could affect the completion of an activity within the proposed scope or budget, the CTP shall complete and submit to FEMA a Special Problem Report (SPR) as soon as possible after the issue is identified. The SPR describes the issue and proposes possible resolutions. For additional information on SPRs, consult the FEMA Regional Office.

Information supporting FEMA standards and requirements regarding the TSDN and FEDD file may be found in the "[Data Capture Technical Reference](#)" document and other associated guidance documents.

Table 40. TSDN Section Mapping Activities

Mapping Activities	TSDN Section											
	Change Requests	Telephone Conversation Reports	Meeting Minutes/ Reports	General Correspondence	Hydrologic Analyses	Engineering Analyses	Hydraulic Analyses	Key to Cross-Section Labeling	Key to Transect Labeling	Draft FIS Report	Mapping Information	Miscellaneous Reference
Discovery Data Capture	X	X	X	X							X	X
Independent QA/QC: Discovery Data Capture	X	X	X	X							X	X
Survey Data Capture	X	X	X	X	X		X	X	X			X
Independent QA/QC: Survey Data Capture	X	X	X	X	X		X	X	X			X
New/Existing Topographic Data Capture	X	X	X	X							X	X
Independent QA/QC: New/Existing Topographic Data Capture	X	X	X	X							X	X
Terrain Data Capture	X	X	X	X							X	X
Independent QA/QC: Topographic Data Capture	X	X	X	X							X	X
Base Map Data Capture	X	X	X	X	X		X	X	X	X	X	X
Independent QA/QC: Base Map Data Capture	X	X	X	X	X		X	X	X	X	X	X
Hydrology Data Capture	X	X	X	X	X	X	X	X	X	X		X
Independent QA/QC: Hydrology Data Capture	X	X	X	X	X		X	X	X	X		X

Mapping Activities	TSDN Section											
	Change Requests	Telephone Conversation Reports	Meeting Minutes/ Reports	General Correspondence	Hydrologic Analyses	Engineering Analyses	Hydraulic Analyses	Key to Cross-Section Labeling	Key to Transect Labeling	Draft FIS Report	Mapping Information	Miscellaneous Reference
Hydraulics Data Capture	X	X	X	X	X	X	X	X	X	X		X
Independent QA/QC: Hydraulics Data Capture	X	X	X	X	X		X	X	X	X		X
Coastal Data Capture	X	X	X	X	X	X	X	X	X	X		X
Independent QA/QC: Coastal Data Capture	X	X	X	X	X		X	X	X	X		X
Levee Data Capture	X	X	X	X	X	X	X	X	X	X		X
Independent QA/QC: Levee Data Capture	X	X	X	X	X		X	X	X	X		X
Levee Analysis and Mapping Procedures (LAMP) Data Capture	X	X	X	X	X	X	X	X	X	X		X
Independent QA/QC: LAMP Data Capture	X	X	X	X	X		X	X	X	X		X
Floodplain Mapping Data Capture	X	X	X	X	X		X	X	X		X	X
Independent QA/QC: Floodplain Mapping Data Capture	X	X	X	X	X		X	X	X		X	X
Draft Digital Flood Insurance Rate Map (DFIRM) Database Capture	X	X	X	X							X	X
Independent QA/QC: Draft DFIRM Database Capture	X	X	X	X							X	X
Flood Risk Products Data Capture	X	X	X	X							X	X

Mapping Activities	TSDN Section											
	Change Requests	Telephone Conversation Reports	Meeting Minutes/ Reports	General Correspondence	Hydrologic Analyses	Engineering Analyses	Hydraulic Analyses	Key to Cross-Section Labeling	Key to Transect Labeling	Draft FIS Report	Mapping Information	Miscellaneous Reference
Independent QA/QC of Flood Risk Products Data Capture	X	X	X	X							X	X
Produce Preliminary Products Data Capture	X	X	X	X							X	X
Independent QA/QC: Preliminary Products Data Capture	X	X	X	X							X	X
Distribute Preliminary Products	X	X	X	X							X	X
Due Process Management	X	X	X	X							X	X
Event Data Capture												
Final Mapping Products Management	X	X	X	X							X	X

1.10. Certifications

1.10.1. DATA CAPTURE

Data Capture: Please refer to the current “Data Capture Technical Reference” (November 2021) document, located at [Data Capture Technical Reference \(fema.gov\)](https://www.fema.gov/data-capture-technical-reference), for instructions on certifications. Generally, each Data Capture task includes certification forms and a project narrative. Mapping Partners should complete and submit only one Certification of Completeness and/or one Certification of Compliance form when the task is complete.

1.10.2. PERFORM FIELD SURVEYS AND DEVELOP TOPOGRAPHIC DATA

A Registered Professional Engineer or Licensed Land Surveyor shall provide an accuracy statement for field surveys and/or topographic data used and shall certify these data meet the accuracy statement provided. Data accuracy should be stated used the Federal Geographic Data Committee National Standards for Spatial Data Accuracy, but the American Society for Photogrammetry and Remote Sensing accuracy reporting standards are acceptable.

1.10.3. PREPARE BASE MAP

- A community official or responsible party shall provide written certification that the digital data meet FEMA minimum standards and specifications.
- The CTP shall provide documentation that the digital base map can be used by FEMA and freely made available to the public. Please note that uploading Base Map data to the MIP does not constitute agreement that the digital base map can be used by FEMA. Documentation that the digital base map can be used by FEMA is still required.
- Certifications are required at the time the intermediate or final data is submitted.

1.10.4. DEVELOP HYDROLOGIC DATA, DEVELOP HYDRAULIC DATA, PERFORM COASTAL ANALYSIS, AND PERFORM FLOODPLAIN MAPPING

- A Registered Professional Engineer shall certify hydrologic and hydraulic and coastal analyses data in accordance with 44 CFR 65.6(f).
- Any levee systems to be accredited will be certified by the levee owner or other appropriate entity in accordance with 44 CFR 65.10.
- Certifications are required at the time the intermediate or final data is submitted.

1.11. Technical Assistance and Resources

Project Team members may obtain copies of FEMA-issued Letters of Map Change (LOMCs), archived engineering backup data, and data collected as part of the CNMS process from FEMA and/or your FEMA Regional PO.

General technical and programmatic information can be downloaded from the FEMA website at <https://www.fema.gov/cooperating-technical-partners-program>. Specific technical and programmatic support may be provided through FEMA and/or its contractor; such assistance should be requested through the FEMA Regional PO specified in *Table 1. Project and Point of Contact Information*.

Project Team members also may consult with the FEMA Regional PO to request support in the areas of selection of data sources, digital data accuracy standards, assessment of vertical data accuracy, data collection methods or subcontractors, and Geographic Information System (GIS)-based engineering and modeling training.

Please contact the region to obtain the most recent version of the Risk MAP timeline.

Assistance with the MIP may be requested at FEMA-RiskMAP-ITHelp@fema.dhs.gov.

2. Part 2 – Available FRP Scope Activities

Note, unless otherwise noted in [Part 1.2.1](#), Identify FRP MAS Activities and Deliverables to be Completed, Custom Scope Elements cell(s), CTP is required to fulfill all scope required within the tasks described below. Additionally, all task documentation and correspondence associated with the corresponding tasks will be submitted to FEMA upon completion of those tasks.

The objective of the FRP documented in this MAS is to develop and/or support flood hazard data and program-related tasks through completing technical risk analysis and mapping activities. These activities may or may not result in a new or updated FIRM and FIS report for one or more communities within the project area.

The mapping activities outlined in this MAS will be completed as specified in the Cooperative Agreement Funding Opportunity Announcement, Award Notice and/or Articles of Agreement. The Mapping Activities may be terminated at the option of FEMA or the CTP in accordance with the provisions of the Partnership Agreement. If these mapping activities are terminated, all products produced to date must be submitted and updated into the MIP (if applicable) and the remaining funds, provided by FEMA for this MAS, from uncompleted activities will be returned to FEMA.

2.1. Earned Value Data Entry

Scope: The FEMA MIP is designed to track the earned value of FRPs. This information is automatically calculated by the MIP, using the actual cost and schedule of work performed, or “actuals,” and comparing them to the expected cost and schedule of work performed, or “baseline.”

Once the FEMA Regional Office has funded a project, FEMA or its contractor will create the tasks in the MIP. This step establishes the baseline for the project in the MIP, using the cost and schedule information for each task as outlined in this document.

The MIP study application allows FEMA and the CTP to manage the status of these projects at a task level. The cost and schedule information, updated monthly by the CTP for each contracted task, is compared to the baseline established for those tasks. This information is rolled up to a project level and monitored by the FEMA Region to assess progress and earned value.

Earned Value data entry involves updating cost, schedule, and performance (physical percent complete), and as of date in the MIP by the CTP each month for each assigned task.

Once the baseline has been established in the MIP, the CTP shall input the performance and actual cost to date for all tasks within each project for which the CTP is responsible. This must be completed at a minimum once every 30 days and at the completion of the task. When a task is completed and has been validated (if applicable), the CTP shall enter 100 percent complete, enter the actual completion cost, and the actual completion date within the Track Task Progress

Workbench as applicable. The tasks will be available on the Track Progress workbench up to 90 days after the completion of the producer task in each purchase.

The MIP shall also be populated with appropriate leverage information regarding who (CTP or community) paid for the data provided and the amount of data used by the FRP. The CTP will maintain a SPI and CPI between 0.92 and 1.08. SPRs explaining any variance must be submitted in a timely manner as required.

The CTP is required to report on the earned value of projects that are in the MIP monthly and must give explanations for variances outside of the tolerance defined above. FEMA Regional Offices must implement a Corrective Action Plan (CAP) when a CTP partner is outside of the tolerance. A CAP must define the reason for the variance and the intended resolution. FEMA Regional Offices must coordinate with FEMA Headquarters when CAPs are developed.

Program Management and overarching Community Outreach and Mitigation Strategies (COMS) Statement of Work (SOW) tasks are now tracked in the MIP. Cost and schedule performance measures must be defined and documented in those separate MAS or SOW. These measures must be used to monitor partner performance and to determine future funding eligibility. This exception only applies to tasks not able to be conducted or tracked in the MIP.

The FEMA Regional PO as needed, may request additional information on status of the project on an ad hoc basis.

2.2. Discovery Data Capture

Discovery begins once a watershed has been prioritized and sequenced. Discovery is the process of evaluating a watershed to determine what components of a FRP may be appropriate. A FRP may include regulatory and non-regulatory flood hazard identification, risk assessment, Mitigation Planning Technical Assistance, and outreach and communication assistance. The FRP may include one of these elements or all of these elements, depending on the need in the watershed. Discovery is divided into five main activities — Stakeholder Engagement, Data and Information Collection, Discovery Meeting, Post-Discovery, and Scope Refinement.

If BLE is performed prior to Discovery, it will be used to assess the current flood hazard inventory and made available to communities during the Discovery phase of the Flood Risk Project. CTPs will use BLE data to provide cursory flood hazard analysis results and support data visualization to better engage community stakeholders. CTPs will also use BLE data to support engagement and productive communication.

Numerous templates have been created to aid the CTP during Discovery. Please contact the FEMA Region to obtain the templates. These templates can be utilized during Discovery as necessary and appropriate for the project. Mapping Partners may revise or change these Discovery templates as needed, in coordination with the FEMA Regional Office.

The CTP shall produce deliverables listed in the Discovery Data Capture section within the most currently dated Data Capture Technical Reference document, located at <https://www.fema.gov/media-collection/technical-references-flood-risk-analysis-and-mapping>. Additional information regarding Discovery and BLE are located at [Guidance for Flood Risk Analysis and Mapping \(fema.gov\)](#) and [Base Level Engineering Analysis and Mapping \(fema.gov\)](#).

2.2.1. STAKEHOLDER ENGAGEMENT

Scope: Stakeholder engagement begins with upfront coordination with the PMT to plan the Discovery effort, identify roles and responsibilities, and plan the level of stakeholder engagement, which can be scaled to engage the appropriate level of project stakeholders based on community need and risk. Coordination with this team, including state and FEMA representatives with mapping, risk, and mitigation expertise, should be ongoing throughout Discovery. In addition to collecting data from national and state datasets and mitigation plans, information about communities is collected through two-way information exchange before the Discovery Meeting. All activities leading up to the Discovery Meeting are intended to increase involvement, build partnerships, reduce the potential for conflict, and ensure that more people are engaged in discussing local risks and considering mitigation actions from day one. Some examples of pre-Discovery Meeting activities include:

When the Stakeholder Engagement deliverable is selected in [Part 1.2.1](#) in *Table 6. Task 2 – Discovery Data Capture*, the following activities will be performed: (Provide documentation on the following activities and/or reports listed)

- *Community Understanding Activities* – Community understanding activities include developing community profiles to better understand communities throughout the watershed before Discovery begins. A community profile may include information such as where people live and work, their incomes, the hazards they are subject to, frequency and intensity of those hazards impacting the community, and goals and strategies from their mitigation plan.
- *Development of an engagement plan* – To reach the key community stakeholders, such as local officials and community partners, and to develop or enhance relationships with key community stakeholders to increase the reach of messages about risk and to improve the local will and ability to take mitigation actions.
- *Introductory and Pre-call Screenings* – Introductory and pre-call screening activities include conducting a pre-Discovery interview with each of the key influencers to ensure understanding of FEMA's involvement with the community, as well as gain/obtain more information on what is important to the influencer.

2.2.2. DATA AND INFORMATION COLLECTION

Scope: At the beginning of the Discovery process, the Mapping Partner shall begin collecting data and information from federal, state, tribal, and local sources. In addition to the more technical data, the Project Team will collect information on areas of vulnerability that need to be mitigated through future actions, as well as details on completed mitigation projects.

2.2.3. DATA INFORMATION ANALYSIS

Scope: Discovery-related data that incorporates appropriate background research shall be provided to the communities prior to the Discovery Meeting and presented at the Discovery Meeting to facilitate discussions.

When the Data Information Analysis deliverable is selected in [Part 1.2.1](#) in *Table 6. Task 2 – Discovery Data Capture*, the following activities will be performed: (Provide documentation on the following activities and/or reports listed)

- Following the Discovery Meeting, a Discovery Report and associated data shall be provided to communities.

2.2.4. DISCOVERY MEETING

Scope: A Discovery Meeting with project stakeholders is a required activity of Discovery. All communities and other stakeholders as identified by the PMT are invited to the Discovery Meeting, which may be virtual, hybrid, in-person or via teleconference. Analysis of the data collected prior to the meeting should be used as a facilitation tool during the meeting to support discussions about appropriate topics such as: Risk MAP, the watershed vision, local flood-related concerns and potential mitigation strategies, regulatory map study needs, risk assessment, and local communication capabilities and responsibilities. Newly identified or improved mitigation strategies should be documented at the meeting, as well as support needed for communities to advance mitigation actions.

Activities will include:

- Develop or enhance relationships with key community stakeholders to increase the reach of messages about risk and to improve the local will and ability to take mitigation actions;
- Drive attendance with outreach to meeting invitees through personalized emails and calls;
- Develop a baseline to inform the creation of a Resilience Activity Roadmap, including identifying real risk and pain points for hazards;
- Track engagement efforts and responses to reflect ongoing work;
- Facilitate meeting and breakout sessions;
- Develop an outreach toolkit (select from materials such as a fact sheet, talking points, social media template, Frequently Asked Questions (FAQs), brochures, and media engagement);
- Develop a community-specific infographic or dashboard to help local officials visualize complex ideas;

- Conduct a post-meeting review session with the study team and provide a future recommendations report (1-2 pages);
- Provide mitigation assistance to the community to increase their ability to act.

When the Discovery Meeting deliverable is selected in *Table 6. Task 2 – Discovery Data Capture*, the following activities will be performed: (Provide documentation on the following activities and/or reports listed)

- Develop an engagement plan to reach the key community stakeholders, such as local officials and community partners, during Discovery;
- Create a Discovery Report (20-30 pages);
- Collect Project Charters (if used);
- Create a post-meeting outreach plan with a public awareness toolkit and coordination with community officials to identify available resources to promote flood risk education; Documentation of all contacts; engagements; toolkits and baseline data

2.2.5. POST-DISCOVERY

Scope: After the Discovery Meeting, the Mapping Partner shall provide meeting notes, outreach materials, and updated contacts to the attendees and stakeholders. The Mapping Partner shall collect Project Charters (if used). The Mapping Partner will update the Discovery Report to reflect the meeting discussions and include recommendations for an FRP. A final Discovery Report and appropriate data are provided to stakeholders. A list of all actions discussed with the communities will be provided to FEMA within two weeks after meetings are held.

When the Post-Discovery deliverable is selected in *Table 6. Task 2 – Discovery Data Capture*, the following activities will be performed: (Provide documentation on following activities and/or reports listed)

- The CNMS Regional File Geodatabase shall be updated to reflect information gathered during Discovery, for needs and/or requests as appropriate.
 - Updated, cleaned, linework reflecting any new validation that has changed as a result of evaluation or determination of study during Discovery.
 - Supporting documentation for new validation.
 - An updated requests layer containing all requests made as part of Discovery.
 - A self-Certified CNMS spatial database using the CNMS QC tool.

- CNMS database will be updated to reflect the status of all streams or shorelines within the watershed, whether scoped or not.
- The P4 and MIP should be updated per the Geospatial Data Coordination (GDC) Guidance to reflect data collected.
- The final Discovery Report, and appropriate data must be uploaded to the MIP.
- Identification of whether Project Refinement and project charters were utilized as part of Discovery, and delivery of final signed documents

2.2.6. SCOPE REFINEMENT

Scope: FEMA and the CTP shall work with communities to refine the elements of the project and update the Discovery Report as needed. FEMA and the CTP may also coordinate with communities to develop a project charter to document the FRP and the roles and responsibilities of all parties. If used, project charters are distributed to each community affected by a planned FRP, and the CTP will track the number of signed charters.

When the Scope Refinement deliverable is selected in *Table 6. Task 2 – Discovery Data Capture*, the following activities will be performed:

- Identification of if Project Refinement and project charters were utilized as part of Discovery, and delivery of final signed documents

2.3. Event Data Capture

Note: The performance of community engagement and outreach takes place throughout the life of the FRP. Work with your FEMA Region to develop a Project Outreach and Communication Plan.

An alternate tracking method is acceptable with approval from the FEMA Regional Office. Up to 10 percent of the total budget can be used for Community Engagement. An additional (up to) 10 percent of the total budget can be used for Project Outreach. The activities identified here are for project specific community engagement and outreach. The overarching COMS SOW can be used for broader program wide engagement activities.

2.3.1. RISK COMMUNICATION AND OUTREACH

Scope: Risk Communication & Outreach activities funded through this MAS shall not supplant or duplicate Community Engagement activities funded through other grants or contracts. There is a separate SOW document used to document additional program-wide COMS activities performed by CTPs.

The activities listed below are intended to support on-going efforts specific to this project that foster working relationships between federal, state, tribal, and local governments with private and public interests to reduce the impact of natural disasters where a community's interaction with a natural hazard may be altered or averted. These activities should be reviewed for implementation throughout the Risk MAP lifecycle, including the defined meetings within it.

It is expected that including these approaches will assist in increased risk awareness and the development of actionable measures to reduce risk within the FRP footprints. These activities should be implemented as directed by the FEMA Regional PO to:

- Increase the understanding of natural hazard risk within a community.
- Support local efforts to reduce natural hazard risk within a community or watershed area.
- Increase the effectiveness of meetings and engagement opportunities with communities throughout the Risk MAP life cycle.

2.3.2. ADVANCING MITIGATION ACTION

Scope: When an individual, community, watershed group, or other entity takes actions to reduce the risk of a hazard to individuals in that community, watershed, or otherwise, that is known as a mitigation action. Advancing mitigation actions and strategies is a key part of the Risk MAP program vision and of moving communities towards resilience (defined as reducing vulnerability and overall risk while increasing ability and agility to recover). As such, identifying and helping communities implement mitigation actions should be a component of each FRP. Community mitigation action cannot be purchased (meaning, mitigation projects cannot be purchased through a Risk MAP project); however, it can be influenced and advanced by proper project and communications planning throughout the Risk MAP process. Strategic communication planning can be assisted by the tools and tactics identified below.

2.3.3. WATERSHED AND COMMUNITY ASSESSMENT

Scope: When you are working with a community, it is important to understand the challenges they face. Sometimes a seemingly obvious challenge is actually rooted in something entirely different. This is important information gathering both to understand the communities you are working with and also may inform your mapping and outreach processes. CTPs should plan time to meet with watershed and high risk communities to understand what is important to them, their mitigation priorities, and their existing relationships with FEMA. This communication may include holding telephone, virtual, or in-person discussions with local officials and residents to understand the watershed and identify key stakeholders. The discussions should include local planners, floodplain administrators (FPAs), elected officials, community leaders (including local organizations), local levee/dam/coastal leadership/business owners and others, based on local needs and the guidance provided on Discovery stakeholders.

2.3.4. ACTION IDENTIFICATION, PLANNING, AND ASSESSMENT

Scope: Support for communities to identify and/or advance mitigation opportunities, and/or select amongst alternatives, through the provision of data, analysis and/or strategic support. Based on information learned from conversations with community influencers, the Hazard Mitigation Plan, and information obtained through Discovery, identify the top 2–3 actions to focus on advancing within each community, and work with community contacts to create a plan to advance them.

2.3.5. 30-DAY REVIEW OF PROPOSED MODELS

Scope: Before any data development tasks supporting a FRP that includes a FIRM update begin, each community affected by new or updated regulatory products (FIS or FIRM) must be notified of the planned model or models to be used. The affected communities will be provided with a 30-day review period beginning upon notification to consult with FEMA and the CTP regarding the appropriateness of the mapping model or models to be used. The results of the consultation do not necessarily guarantee that a change should be made, and decisions should be clearly documented. This consultation does not waive or otherwise affect the right of the community to later appeal any flood hazard determinations. See Standard Identification (SID) 620 for more information, available at <https://www.fema.gov/media-collection/flood-risk-templates-and-other-resources>.

2.3.6. 30-DAY REVIEW OF COMPLETED MODELS, WORK MAPS, AND DATABASE

Scope: When a FRP will include new or updated FIRM panels, the CTP must provide access to the draft FIRM database and other contributing data, as requested, to the communities by the conclusion of Quality Review 1. The CTP also must provide the affected communities with a 30-day review period, during which the communities may provide data to FEMA and the CTP that can be used to supplement or modify the existing data. The CTP should incorporate any community-submitted data into the project as appropriate. In order to be directly incorporated into the study, data or information submitted must be consistent with prevailing engineering principles or demonstrate scientific incorrectness by one or more of the following:

- Identifying and providing documentation of the methods or assumptions purported to be scientifically incorrect.
- Providing supporting data as to why the methods or assumptions used are not appropriate.
- Providing new or alternative analysis and mapping data utilizing methods consistent with prevailing engineering principles and meeting FEMA's Standards.
- Providing technical information or data indicating why the provided new or updated analysis and mapping should be accepted as more correct.

See SID 621 for more information, available at <https://www.fema.gov/media-collection/flood-risk-templates-and-other-resources>.

2.3.7. TELEVISION AND RADIO OUTREACH

Scope: The Project Team, in coordination with the appropriate staff in the FEMA Regional Office of External Affairs, other FEMA staff, and community officials, shall engage with local radio and television outlets in an effort to further educate property owners about flood map revisions and appeals processes. FEMA cannot fund advertising, so public service announcements should be considered as a prime opportunity to meet this standard. Any engagement with the media should include explanations of the entire appeal process for flood hazard information, including comments on other information on the FIRM and FIS report. Users should review the Stakeholder Engagement – Due Process Guidance document available at https://www.fema.gov/sites/default/files/2020-02/Stakeholder_Engagement_Post_Prelim_Due_Process_Guidance_Nov_2019.pdf and SID 622 available at <https://www.fema.gov/media-collection/flood-risk-templates-and-other-resources> for more information.

2.3.8. MEETINGS

Scope: FRPs will include in-person and/or virtual opportunities, as appropriate, to engage communities, build risk awareness, increase capabilities for risk communication, and stimulate mitigation action at the local level. The overarching goal is to create a climate of understanding and ownership of the mapping process at the state and local levels. Well-planned and executed community engagement and project outreach can reduce political stress, confrontation in the media, and public controversy, which can arise from lack of information, misunderstanding, misinformation, and/or lack of inclusion. These engagement and outreach activities also can assist the CTP, FEMA, and other members of the PMT in responding to congressional inquiries. The CTP is expected to capture all meeting information including sign-in sheets, attendee lists, meeting minutes, and shared documents in the MIP.

Provisions should be made for remote access video/audio feeds for those that cannot attend in person, or as an alternate to in-person meetings as needed. These opportunities consist of:

- *Discovery Meeting* – This meeting is held to engage communities, understand the communities' and watershed's needs, inform the purpose of FEMA's engagement, balance FEMA resources, build partnerships, and plan project execution. It is a working meeting that brings together a large cross-section of community stakeholders with interests related to flood risk and mitigation. It provides all the communities within a project area with an opportunity to validate the collected information and to identify any areas of local concern that may not have been captured through previous research or interviews. Discovery is included as a separate task within this MAS.
- *Project Initiation Meeting/Coordination Call* – This communication will serve to discuss the project scope and timeline, set expectations for communities with regard to risk communication, share methods and data to be used in the mapping efforts if included in the project, and answer any local questions about the project. If regulatory product updates are included, this meeting can also serve as the required coordination with communities regarding the expected results (increasing/decreasing flood hazard areas/depths, etc.). This can be held as an in-person meeting, webinar, or conference call. Note: although not required unless regulatory products are

involved, this call/meeting is especially helpful for introducing the project to the involved communities when six months or more has passed since the post-Discovery coordination.

- *Local Levee Partnership Team (LLPT) Meeting* – If a known hydraulically significant levee is in the geographic project area, then per the Guidance for Flood Risk Analysis and Mapping - Levees, February 2018, a LLPT meeting formation and appropriate level of engagement is conducted. A LAMP Data capture task(s) will be created in the MIP to collect non-engineering data from the LLPT meetings for each hydraulically significant levee. See *Table 36. Levee System Data in Study Area*.
- *Flood Risk Review Meeting* – This meeting will serve to provide communities with engineering data and drafts of Flood Risk products, collect feedback, and revise as needed. It will also provide the opportunity to show how the datasets and outreach tools can help communities become more resilient by understanding risk data, communicating about risk, prioritizing mitigation actions and improving mitigation plans, especially risk assessments and mitigation strategies. Activities include planning, presenting, and facilitating discussions of data inputs and engineering models used for flood studies with community officials. In addition, draft work maps showing initial study results will be presented during the meeting. This meeting may also be used to kick off or occur during the 30-day review of materials at the workmap stage (workmap, associated models, etc.). Note: It is also recommended that for a coastal storm surge study, a meeting be held with the community and additional stakeholders as appropriate to review the results of the storm surge or Stillwater modeling before proceeding to modeling coastal wave heights and mapping.

Activities include:

- Develop an engagement plan to reach the key community stakeholders, such as local officials and community partners, during the Flood Risk Review period.
- Develop or enhance relationships with key community stakeholders to increase the reach of messages about risk and to improve the local will and ability to take mitigation actions.
- Drive meeting attendance through personalized follow-up emails and calls to invitees.
- Conduct webinar to further engage and inform attendees.
- Track engagement efforts and responses to reflect ongoing work.
- Facilitate meeting.
- Talk with local officials regarding their desired role in engaging the public after the issuance of Preliminary FIRMs.
- Develop/update an outreach toolkit (select from materials such as fact sheets, talking points, FAQs, and brochures).

- Revise or create a Community Profile and/or dashboard to reflect the most current community information and insights.
- Conduct a post-meeting review session with the project team and provide a future recommendations report.
- Identify and document community commitments, such as mitigation action and engagement activities, to inform future interactions with the community. Update and collect Project Charters (when applicable).
- *Resilience Meeting* – The meeting will provide a comprehensive view of mitigation planning, mitigation options available to communities, sharing of success stories, and potential mitigation actions that communities can initiate. Activities include the planning, presenting and facilitation of community discussions related to mitigation plan status, community risks and hazards, local mitigation action opportunities and best mitigation practices. Mitigation strategies that communities have implemented or progressed on since Discovery should be documented at, or before, this meeting. In addition, discussions about a community’s outreach plans during this meeting help enable local officials to begin or strengthen local risk communication.

Activities include:

- Develop/update an engagement plan to reach potential partners in resilience, such as local officials and community partners.
- Conduct listening sessions with community stakeholders to understand their mitigation priorities and inform the Resilience Meeting agenda.
- Foster relationships between community stakeholders and federal and state partners to improve the local ability to take mitigation action.
- Drive meeting attendance through personalized follow-up emails and calls to invitees.
- Stand up a Resilience Team composed of FEMA Regional staff and Subject Matter Experts to prepare for the Resilience Meeting and support the community.
- Brief local elected officials to promote understanding about the importance of community-wide resilience and the community’s flood risk.
- Facilitate meeting.
- Provide community-specific applications/explanations of Flood Risk Products to educate community officials on how to leverage the products to achieve or inform mitigation projects.
- Coordinate with other key stakeholders, such as government agencies and nonprofits, who will work with the community towards resilience in a “Resilience Marketplace.”

- Provide the community with a media relations strategy template and sample tools (e.g., media advisory, talking points) to promote community understanding of flood risk and further the discussion of important community mitigation projects.
 - Revise or create a Community Profile and/or dashboard to include the most current community information and insights.
 - Create a Resilience Report and dataset.
 - Capture potential mitigation actions identified and/or advanced community mitigation activities.
 - Create a post-meeting outreach plan with a public awareness toolkit (including web content, newsletter content, media follow-up, etc.) to assist the community in keeping the public informed of the valuable mitigation as they advance actions in their community to increase public buy-in.
 - Develop a follow-up plan (1-year mitigation check-up, etc.) to increase community touchpoints and maintain relationships after the Risk MAP project ends. Post-Resilience support can be scoped under Special Services.
- *Final Consultation Coordination Officer (CCO) Meeting and Public Meeting (or Open House)* – If regulatory products are included in an FRP, these meetings will provide local officials an opportunity to verify the appropriate revisions have been made to previously demonstrated information, take ownership of the products, and deliver the results of the project to local community members. Activities include planning, presenting, and facilitating discussions with community officials for awareness and acceptance of regulatory products. The purpose of the meeting will be to review data inputs to a flood study, preview changes to preliminary FIRM data and maps, discuss newly identified flood risk and community actions to reduce risk, and provide information about the appeals period, map adoption, and insurance impacts. The CTP will support the local officials at the Public Meeting or deliver the messages at the Public Meeting if the local officials are unwilling. Also, communities will be encouraged to identify short- and long-term efforts to progress towards increasing flood risk awareness and management. These meetings can be held concurrently or separately at the region and community's discretion.

Activities include:

- Develop/update an engagement plan to reach key community stakeholders, such as local officials, community partners, and key members of the public, for the Consultation Coordination Officer meeting and preliminary map release.
- Develop or enhance relationships with key community stakeholders to increase the reach of messages about risk and to improve the local will and ability to take mitigation actions.
- Drive meeting attendance through personalized follow-up emails and calls to invitees.

- Conduct webinar meetings to further engage and inform attendees.
- Track engagement efforts and responses to reflect ongoing work.
- Facilitate meetings.
- Begin conversations with local officials about Flood Risk Products (Average Annualized Loss data, Changes Since Last FIRM, etc.) to prepare them for more robust conversations about overall risk and the road to resilience.
- Develop/update an Outreach Toolkit (select from materials such as a fact sheet, talking points, social media template, FAQs, brochures, and media engagement)
- Create or revise a Community Profile and/or dashboard to include the most current community information and insights.
- Hold feedback check-ins with local officials to gauge their satisfaction with the process to date.
- Conduct a post-meeting review session with the project team and provide a future recommendations report.
- Create a post-meeting outreach plan with a public awareness toolkit and coordination with community officials to identify available resources to promote flood risk education.
- Identify and document community commitments, including mitigation action and engagement activities, to inform future interactions with the community.

For all meetings, provisions may be made for remote access video/audio feeds for those that cannot attend in person.

The actual number of meetings will be determined based on the risk, need, and interest at the local level and determined as part of developing the project-based communication plan.

2.3.9. STATUS REPORTS

Scope: In addition to Risk MAP meetings, to facilitate information sharing and a continuing dialogue between the PMT and the community, the CTP will provide communities with regular status reports outlining the current project status, key accomplishments to date, identified risks, if any, and next steps including estimated next meeting date and meeting content (template to be provided by FEMA or can be created by Mapping Partner). These status reports will be provided to FEMA for review before electronic distribution. Project update status reports will be distributed to communities at mid-points between each of the meetings, and between the Final Meeting and effective date (if included in this MAS), to help introduce and prepare the communities for upcoming discussions.

2.4. Project Outreach and Communication Plan (POCP)

Scope: The CTP will work with the FEMA Regional Office during the initiation of this activity to develop the Project Outreach and Communication Plan (POCP) to support the implementation of the mapping project. The FEMA Regional Office will have access to many customizable outreach tools that have been developed for this process to support each touchpoint that the PMT has with the community.

2.5. Flood Risk Products Data Capture

Scope: Flood hazard risk assessment data and analyses are used to make informed decisions to reduce the impacts of the hazard on people and property. As part of the Risk MAP Program, Flood Risk Products shall be developed for study areas¹⁰ as listed in *Table 41. Flood Risk Products*.

Table 41. Flood Risk Products

Flood Risk Product/Dataset		New Flood Hazard Analysis Conducted (1)	No New Flood Hazard Analysis Conducted (1)
Flood Risk Database		Required	Required
Flood Risk Data Set	CSLF	Automated (2)	N/A
	Water Surface Elevation Grids	Required (3)	Optional (4)
	Flood Depth Grids	Required (3)	Optional (4)
	Percent Annual Chance & Percent 30-Year Chance Grids	Required (5)	Optional (4)
	Flood Risk Assessment	Required (6,8)	Required (7,8)
	Areas of Mitigation Interest (AoMI)	Required	Required
Flood Risk Map		Optional	Optional
FRR		Optional	Optional

Notes for Table 41:

1. “New Flood Hazard Analysis” = Flooding sources receiving regulatory-level analyses
2. CSLF is optional in areas where digital modernized floodplain boundaries are not available for the effective, and its creation would be performed by the mapping partner, not automated tool.
3. Riverine Studies: 10%, 4%, 2%, 1%, “1%+”, and 0.2% annual-chance floods.
Coastal Studies: The 1% and 0.2% annual chance floods and total water levels (Stillwater plus wave effects), plus all return periods for which there is engineering performed.

¹⁰ Refer to SID 417

Levee Studies:

Riverward/Seaward side – same as Riverine or Coastal.

Landward side – only the 1% annual-chance flood scenarios(s) used to delineate Special Flood Hazard Area (SFHA) boundary landward of levee system.

4. Can be produced for flooding sources not receiving new analyses if based on valid current effective data.
5. Riverine only.
6. Riverine Studies: 10%, 4%, 2%, 1%, “1%+”, and 0.2% annual-chance floods.
Coastal Studies: Only the 1% and 0.2% annual chance floods.

Levee Studies:

Riverward/Seaward side – same as Riverine or Coastal

Landward side – only based on the landward depth grid.

7. Assessments are performed for the flood events with available depth grids. See “Technical Reference: Flood Risk Database” for more information.
8. Analysis can be conducted at U.S. Census block or user-defined facility level.

2.6. Independent QA/QC of Flood Risk Products

Scope: Independent QC review activities may be performed by the CTP, PTS, OFA or FEMA’s contractor at the discretion of FEMA. If the CTP, PTS, OFA will be utilizing its staff, contractors, and/or partners to do the QC review, this should be identified during project planning and Discovery. The CTP, PTS, OFA or FEMA’s contractor will be responsible for addressing all comments resulting from independent QC, including resubmittal of deliverables as needed to pass technical review. The independent QC is tied to a checklist available under templates on the Guidelines and Standards for Flood Risk Analysis and Mapping.

2.7. Survey Data Capture

Note: CTPs should consider including and completing this task in the MIP if the partner believes data will need to be submitted during the course of the project, even if conducting field survey is not included in the MAS. In addition, leveraged field survey data must be documented and submitted for this task. Failure to submit this data could result in the workflow being reverted to production tasks and could lead to a delay in the schedule. If the CTP obtains field survey data that was not included in the MAS, the CTP shall contact the Region to submit a change request to include the task and leverage as part of the award and request that this task be added to the study in the MIP.

Scope: To supplement any field reconnaissance conducted during the Discovery phase of this project, the CTP shall conduct a detailed field or desktop reconnaissance of the specific study area to determine conditions along the floodplain(s), types and numbers of hydraulic and/or flood-control structures, apparent maintenance or lack thereof of existing hydraulic structures, locations of cross sections to be surveyed, and other parameters needed for the hydrologic and hydraulic analyses.

The CTP shall conduct field surveys, including obtaining channel and floodplain cross sections, identifying or establishing temporary or permanent benchmarks, and obtaining the physical dimensions of hydraulic and flood-control structures. If appropriate, the CTP shall also identify items needed for coastal analyses including land cover, vegetation types, housing, dunes, beach nourishment, coastal structures, and transects. The CTP shall also coordinate with other entities that are involved in the Topographic Data Development process regarding ongoing activities and deliverables.

Existing survey data, or as-built data, may be used to produce flood studies and related products. However, if existing data are to be collected, the FEMA Region should be consulted before leveraging the best available existing survey data to ensure acceptability for the intended level of flood hazard study.

2.8. Existing or New Topographic Data Capture and Terrain Data Capture

Note: Every MAS for a flood data update must include this task to ensure the topography used is documented and submitted. In addition, leveraged topographic data must be documented and submitted for this task. For coastal studies, include collection or leveraged bathymetry data plans.

Scope: Topographic/elevation data may be new or existing. New is defined as data that will be flown and processed for the areas specified in this MAS as study areas according to the referenced specifications. Existing topographic/elevation data (previously flown and/or processed) may be used to produce flood studies and related products. However, if new data is not to be collected, the FEMA Region should be consulted before leveraging the best available existing topographic to ensure acceptability for the intended level of flood hazard study.

The CTP shall obtain topographic data for the floodplain areas to be studied including overbank areas. This data will be used for hydrologic analysis, hydraulic analysis, coastal analysis, floodplain boundary delineation and/or testing of floodplain boundary standard compliance. The CTP shall gather availability, currency, and accuracy information for existing topographic data covering the affected communities in this MAS. The CTP shall use topographic data for work in this MAS only if it is better quality than that of the original study or effective studies. The Mapping Partner will ensure that the FEMA Geospatial Data Coordination Policy and Implementation Guide is followed, and the data obtained or to be produced are documented properly as per those policies and guidelines.

Requirements for New Topographic Data Capture (if applicable): The CTP shall generate new topographic data for areas defined in *Table 13. Summary of Topographic Elevation Data*. The CTP also shall coordinate with team members conducting field surveys as part of this MAS. All ground control and checkpoint field surveys must be compliant with the current version of the American Society for Photogrammetry and Remote Sensing (ASPRS) Positional Accuracy Standards. Survey completed for New Topographic Data Capture requires:

- Survey report detailing methodology and results for absolute vertical accuracy testing

- Signed and sealed FEMA Certificate of Compliance from a certified Public Land Surveyor
- Survey monument datasheets and photos
- Ground control coordinates or shapefile and photos
- Checkpoint coordinates or shapefile and photos
- Vertical accuracy validation spreadsheet that includes calculations

The CTP will follow guidelines set forth in the Elevation Guidance to determine the appropriate accuracy required for the areas specified in this MAS. All new topographic data collected should meet the requirements outlined in the current version of the United States Geological Survey (USGS) LiDAR Base Specification and must include:

- All scoped data products
- Flight reports
 - Mission planning
 - Collection report(s) and flight logs
- Metadata for all delivered products
- Processing reports detailing the production and quality assurance of each deliverable product
- Spatial files including project area, indices, and areas of low confidence (if applicable)
- Signed and sealed FEMA Certificate of Compliance from a certified Photogrammetrist

In addition, the CTP shall address all concerns or questions regarding the topographic data development and processing that are raised during the Independent QA/QC review. The CTP should confirm with the FEMA Regional PO the appropriate data model(s) (e.g. mass points and breaklines) for the intended use of the data.

Requirements for Existing Topographic Data Capture (if applicable): The CTP shall use topographic data for the areas described in *Table 13. Summary of Topographic Elevation Data*. The source of the topographic data must be listed as well. The CTP shall coordinate with other team members conducting field surveys as part of this MAS. The CTP should follow the guidelines set forth in the Data Capture Standards Guidance, Technical Reference and the Elevation Guidance documentation to determine the suitability of the existing dataset in terms of currency and accuracy. The CTP should confirm with the FEMA Regional PO the use of leveraged topographic data.

In addition, the CTP shall address all concerns or questions regarding the topographic data development that are raised during the Independent QA/QC review.

Requirements for development of Terrain Data Capture (if applicable): For this activity, the CTP shall utilize the data collected under the New and/or Existing Topographic Data Capture task and via field surveys to create a best available digital elevation model for the subject flooding sources. The CTP should confirm with the FEMA Regional PO the appropriate data model(s) (e.g. DEMS) for the intended use of the data.

In addition, the CTP shall address all concerns or questions regarding the topographic data development that are raised during the Independent QA/QC review.

2.9. Independent QA/QC: Topographic Data Capture

Scope: The Independent QA/QC Mapping Partner shall perform an impartial review of the mapping data defined in *Table 13. Summary of Topographic Elevation Data*, to ensure that these data are consistent with FEMA standards and standard engineering practice and are sufficient to prepare the FIRM. FEMA may audit or assist in these activities if deemed to be necessary by the FEMA Regional PO.

Please note FEMA will also be performing periodic audits and overall study/project management to ensure study quality. The CTP will be responsible for addressing any and all comments resulting from independent QC, including resubmittal of deliverables as needed to pass technical review.

2.10. Base Map Data Capture

Note: Every MAS for a flood data update must include this task to ensure the base map used is documented and submitted. In addition, leveraged base map data must be documented and submitted for this task.

Scope: Base map preparation activities consist of obtaining and formatting the digital base map (raster or vector) for the project. Activities also include the review of the base map and obtaining the necessary documentation/verification that base map data source(s) may be used and distributed by FEMA. This task is equivalent to the Base Map Data Capture task in the MIP. The CTP shall prepare and provide the digital base map, including:

- Obtain digital files (raster or vector) of the base map. In coordination with the partner who performed Project Discovery, ensure that the FEMA GDC Policy and Implementation Guide are followed.
- Secure necessary permissions from the base map source to allow FEMA's use and distribution of hardcopy and digital map products using the digital base map, free of charge.
- Review and supplement the content of the acquired base map to comply with FEMA standards.
- For the base map components that have a mandatory data structure, convert the base map data to the format required in FEMA standards.

- Certify that the digital data meets the minimum standards and specifications that FEMA requires for FIRM production.

2.11. Independent QA/QC: Base Map Data Capture

Scope: The Independent QA/QC Mapping Partner shall perform an impartial review of the base map obtained and prepared by the CTP to ensure it includes data consistent with FEMA standards and sufficient to include on the FIRM. Any needed edits should be made to the product to comply with FEMA standards.

Note, FEMA will also be performing periodic audits and overall study/project management to ensure study quality. The CTP will be responsible for addressing any and all reasonable comments resulting from independent QC of the base map, including resubmittal of deliverables as needed to pass technical review.

2.12. Hydrology Data Capture

CTPs must complete this task in the MIP if an updated hydrologic analysis is completed. In addition, leveraged hydrology data must be documented and submitted to the MIP for this task. Failure to submit this task when data should have been submitted is no longer an issue. The MIP redesign allows for tasks to be reopened so that data can be uploaded. Note, however, if the CTP obtains hydrology data that was not included in the MAS, the CTP shall contact the region to submit a change request. The change request will include the task and leverage as part of the award. The CTP will also request that this task be added to the MIP workflow.

Scope: The CTP shall perform hydrologic analyses for the flooding source(s) identified in *Table 19. Summary of Hydrologic Analyses*. Hydrologic analysis activities include the determination of peak flood discharges, the use of rainfall-runoff models, regression equations, gage analysis, and hydrograph development to support the level of detail required for the project. The CTP shall calculate peak flood discharges and/or flood hydrographs for the 10, 4, 2, 1, “1- plus” and 0.2 percent annual chance events using the analysis method listed in *Table 19*. These flood discharges will be the basis for subsequent Hydraulic Analyses performed under this MAS. In addition, the CTP will be responsible for addressing any and all comments resulting from the independent QC, including resubmittal of deliverables as needed to pass the technical review.

The CTP shall document automated data processing and modeling algorithms and provide the data to FEMA to ensure these are consistent with FEMA standards. Digital datasets (such as elevation, basin, or land use data) are to be documented and provided to FEMA for approval before performing the hydrologic analyses to ensure the datasets meet minimum requirements. If non-commercial (i.e., custom-developed) software is used for the analysis, then the CTP shall provide full user documentation, technical algorithm documentation, and the software to FEMA for review before performing the hydrologic analyses.

The CTP will compare the calculated, or computed, discharge with discharge determined from reliable gage data, if any. This comparison will only be done at locations where the two discharge values are considered representative of the same flooding source. Results of this comparison will be used in making a professional judgment for determining the discharge to be used for the hydraulic analysis.

2.13. Independent QA/QC: Hydrology Data Capture

Scope: The Independent QA/QC Mapping Partner shall perform an impartial review of the technical, scientific, and other information submitted by the CTP specific to the hydrologic analyses to ensure that the data and modeling are consistent with FEMA standards and standard engineering practice and are sufficient to prepare the FIRM. FEMA may audit or assist in these activities if deemed to be necessary by the FEMA Regional PO. This work shall include, at a minimum, the activities listed below. Please note FEMA will also be performing periodic audits and overall study/project management to ensure study quality. Where paper documentation is required by state law for professional certifications, the CTP may submit the paper in addition to a scanned version of the paper for the digital record. Please coordinate with the regional and/or state representative to verify state reporting requirements.

- Review the submittal for technical and regulatory adequacy, completeness of required information, and supporting data and documentation. The technical review is to focus on the following:
 - Use of acceptable models;
 - Use of appropriate methodology(ies);
 - Correctly applied methodology(ies)/model(s), including QC of input parameters;
 - Comparison with gage data and/or regression equations, if appropriate;
 - Comparison with discharges for contiguous reaches or flooding sources throughout the watershed.
- Verify that the data was submitted under the applicable folders on the MIP as described in the [“Data Capture Technical Reference”](#) and “Guidance: Data Capture” documents.
- Maintain records of all contacts, reviews, recommendations, and actions and make the data readily available to FEMA.
- The reviewing Mapping Partner must document the results of the review in a memorandum or letter, send it to the Mapping Partner that performed the hydrologic analysis, and post it to the MIP through the Independent QA/QC of Hydrologic Analyses task. The review document must present specific comments and may include any new calculations or model runs in support of the review.

2.14. Hydraulics Data Capture

Note: CTPs must complete this task in the MIP if an updated hydraulic analysis is completed. In addition, leveraged hydraulic data must be documented and submitted to the MIP for this task. Failure to submit this task when data should have been submitted is no longer an issue. The MIP redesign allows for tasks to be reopened so that data can be uploaded. If the CTP obtains hydraulic data that was not included in the MAS, the CTP shall contact the region to discuss the potential need for a change request to include the task and leverage as part of the award and request that this task be added to the MIP workflow.

Scope: The CTP shall perform hydraulic analyses as described in *Table 22. Summary of Hydraulic Analyses*. Hydraulics analysis activities include establishing and reviewing regulatory floodways and flood elevations for the 10-, 4-, 2-, 1-, “1- plus” and 0.2 percent annual chance events based on flood discharge rates computed under Develop Hydrologic Data. The hydraulic methods used for this analysis may include base level and/or enhanced level hydraulic modeling. The base level will use an automated hydraulic model and use the best available elevation data to model the 10-, 4-, 2-, 1-, “1- plus” and 0.2 percent annual chance events. It may not include field surveys, floodways, or mapped Base Flood Elevations (BFEs) but will include mapped A or AE zones per *Table 22*. The enhanced level may include field surveys, floodways, and the 10-, 4-, 2-, 1-, 1- plus and 0.2 percent annual chance events, using methods described in *Table 22*. The Mapping Partner, at a minimum, must delineate the floodplain and floodway, if applicable, boundaries of the base flood. The Mapping Partner must also delineate the floodplain boundaries associated with the 0.2-percent-annual-chance flood if it is calculated.

Table 42. Hydraulic Analysis Options for Base and Enhanced Level Engineering

Option	Cross Sections (1D) or Grid/Mesh (2D)	Flow Paths (Left, Right and Channel)	Manning’s “n” Values	Structures	Flood Zone
A	1D: Auto-placed; may be unnaturally straight with computerized placement or auto-placed by “intelligent” methods. 2D: Mesh auto-generated. Limited refinement and breaklines added to produce reasonable results and to hydro-enforce stream channels with large drainage areas.	1D: Reach lengths are assumed equal. 2D: N/A	1D: Single value for each cross section. 2D: Values based on Land Use Land Cover (LULC) data.	1D: Not included; cross sections auto-placed without consideration of structures. 2D: Breakline enhancements at embankments that are affecting the validity of modeling results.	A

Option	Cross Sections (1D) or Grid/Mesh (2D)	Flow Paths (Left, Right and Channel)	Manning's "n" Values	Structures	Flood Zone
B	1D: Auto-placed and hand adjusted or auto-placed by "intelligent" methods. 2D: Mesh auto-generated but refined in larger stream corridors; breaklines added at significant terrain, transportation embankment, and/or other hydraulic features	1D: Reach lengths computed by offsetting stream centerline. 2D: N/A	1D & 2D: Overbanks from LULC data, channel value estimated separately.	1D: Not included, but cross sections placed appropriately for future incorporation of structure modeling. 2D: Mesh or topographic adjustments added at major stream road crossings to prevent unrealistic "damming" effects.	A
C	1D: Each section is reviewed by engineers. 2D: Mesh size and orientation/breaklines refined in urbanized areas, stream corridors, and at significant terrain, transportation embankment, and/or other hydraulic features.	1D: Reach lengths adjusted based on the draft floodplain. 2D: N/A	1D & 2D: Overbanks from LULC data, channel value estimated separately.	1D: Hydraulically significant structures included or approximated. Estimated using national, state, or other data sources. 2D: Hydraulically significant structures approximated using model/mesh refinements and/or 2D area connection. Estimated using topography and aerial photos where other data is not available.	A

Option	Cross Sections (1D) or Grid/Mesh (2D)	Flow Paths (Left, Right and Channel)	Manning's "n" Values	Structures	Flood Zone
D	1D: Each section is reviewed by engineers. 2D: Mesh size and orientation/breaklines refined in urbanized areas, stream corridors, and at significant terrain, transportation embankment, and/or other hydraulic features.	1D: Reach lengths adjusted based on the draft floodplain. 2D: N/A	1D & 2D: Overbanks from LULC data, channel value estimated separately and calibrated where possible.	1D & 2D: Included; structure data from as-builts, design plans, "measured" in the field, or other community datasets with opening information.	A or AE (with or without floodway based on engineer's judgment)
E	1D: Each section reviewed by engineers, Channel bathymetry included in sections. 2D: Mesh size and orientation/breaklines refined in urbanized areas, stream corridors, and at significant terrain, transportation embankment, and/or other hydraulic features; channel bathymetry included in terrain where applicable.	1D: Reach lengths adjusted based on draft floodplain. 2D: N/A	1D & 2D: Overbanks from LULC data and field data, channel value estimated separately from field data and calibrated where possible.	1D & 2D: Included; structure data from field survey, as-builts, design plans, "measured" in the field, or other community datasets with opening information.	AE (with floodway)

The CTP shall use the cross-section and field data, or leveraged existing survey and as-builts collected during Survey Data Capture and the topographic data collected during the Topographic Data Capture, when appropriate, to perform the hydraulic analyses. The hydraulic analyses will be used to establish flood water surface elevations, floodplain extents, and regulatory floodways for the listed study area or flooding sources.

If applicable, the CTP shall use the FEMA CHECK-2 or CHECK-RAS checking program to verify the reasonableness of the hydraulic analyses. To facilitate the independent QA/QC review, the CTP shall provide explanations for unresolved messages from the CHECK-2 or CHECK-RAS program, as appropriate. In addition, the CTP shall address all concerns or questions regarding the hydraulic analyses that are raised during the independent QA/QC review including resubmittal of deliverables as needed to pass the technical review.

The CTP shall document automated data processing and modeling algorithms for all GIS based studies and provide the data to FEMA for review to ensure these are consistent with the standards outlined above. If non-commercial (i.e., custom-developed) software is used for the analyses, then the CTP shall provide full user documentation, technical algorithm documentation, and software to FEMA for review before performing the hydraulic analyses.

Any flooding sources associated with a levee that are mapped as providing flood hazard reduction on effective FIRMs, but the levee will not continue to meet the requirements of 44 CFR 65.10 to accredit the levee on the new FIRMs, will require revised hydraulic analysis. This revised analysis should be done in accordance with FEMA standards and guidance.

When the BLE deliverable is selected in *Table 21. Task 14 – Hydraulics Data Capture*, the following will be performed:

- *BLE* – BLE production approach combines high-resolution ground elevation data, and modeling technology advancements to create engineering models and flood hazard data. These analyses are produced at a large scale, like a watershed, as opposed to targeting individual stream reaches. CTP will ensure that for all BLE studies, the Hydraulics Data Capture and Draft FIRM Database tasks are created in the MIP. The Hydraulics Data Capture task must be utilized for the delivery of all BLE models, engineering reports, and supporting data.

2.15. Independent QA/QC: Hydraulics Data Capture

Scope: The Independent QA/QC Mapping Partner shall perform an impartial review of the technical, scientific, and other information submitted by the CTP under Hydraulic Analysis to ensure that the data and modeling are consistent with FEMA standards, guidance, and standard engineering practice and are sufficient to revise the FIRM. FEMA may audit or assist in these activities if deemed to be necessary by the FEMA Regional PO. This work shall include, at a minimum, the activities listed below.

Please note FEMA will also be performing periodic audits and overall study/project management to ensure study quality. The CTP will be responsible for addressing any and all comments resulting from independent QC, including resubmittal of deliverables as needed to pass technical review.

- Review the submittal for technical and regulatory adequacy, completeness of required information, and supporting data and documentation. The technical review is to focus on the following:
 - Use of acceptable model(s)
 - Use of appropriate methodology(ies)
 - Starting water-surface elevations
 - Cross-section geometry (for 1D models) or mesh orientation and resolution (for 2D models)

- Manning's "n" values and expansion/contraction coefficients
- Bridge and culvert modeling
- Ineffective and non-conveyance areas
- Flood discharges
- Regulatory floodway computation methods
- Tie-in to upstream and downstream non-revised Flood Profiles and floodways
- Agreement between the model, spatial data, work maps, Flood Profiles and Floodway Data Tables, where applicable
- Calibration of model(s), where high-water marks are available
- Floodplain and floodway boundaries for the 1 percent and 0.2 percent annual chance events
- Verify that the data was submitted under the applicable GEOGRAPHIC FOOTPRINT folders in the MIP.
- Use the CHECK-2 or CHECK-RAS program, as appropriate, to flag potential problems and focus review efforts.
- Maintain records of all contacts, reviews, recommendations, and actions and make the data readily available to FEMA.
- Maintain an archive of all data submitted for hydraulic modeling review. (All supporting data must be retained for three years from the date a funding recipient submits its final expenditure report to FEMA, and once the study is effective all associated data should be submitted to the FEMA library).
- The reviewing Mapping Partner must document the results of the review in a memorandum or letter, send it to the Mapping Partner that performed the hydraulic analysis and post it to the MIP through the Independent QA/QC of Hydraulic Analyses task. The review document must present specific comments and may include any new calculations or model runs in support of the review.

2.16. Coastal Data Capture

Scope: The CTP shall perform a coastal analysis for flooding sources identified in *Table 25. Summary of Coastal Data*. The coastal analysis shall include the following components as necessary:

- Terrain and Bathymetric Data Processing;
- Combined Topo-Bathy Seamless DEM;

- Land Use and Manning's "n"
- Field Reconnaissance;
- Water level Station Analysis;
- Wave gage Analysis;
- Storm Statistical Analysis;
- Storm Selection;
- Develop 2D Model Grid;
- Tidal Calibration and Validation;
- Wind and Pressure Field Development;
- Storm Validation (Storm Surge and Wave Height & Period);
- Storm Production;
- Return Period Analysis (50% to 0.2%);
- Transect Layout;
- Primary Frontal Dune Assessment;
- Coastal Structure Analysis;
- Coastal Levee Analysis;
- Erosion Analysis;
- Overland Wave Height Analysis (1% and 0.2%);
- Limit of Moderate Wave Action (LiMWA) Analysis;
- Wave Runup and Overtopping Analysis;
- 0.2% coastal Wave Envelope FIS Profiles;
- Combined probability analysis for riverine areas in coastal floodplain;
- Coastal Hazard Mapping and Workmap development.

2.17. Independent QA/QC: Coastal Data Capture

Scope: The CTP shall perform QA/QC of all Coastal Data.

2.18. Floodplain Mapping Data Capture

Scope: CTPs must complete this MIP task to represent the conflation of floodplains and related data layers (specified in the FIRM Database Technical Reference) for the project area based on any leveraged data, redelineation or digital conversion of effective study data, and new or updated hydraulic or coastal analyses as delivered under the Hydraulics Data Capture or Coastal Data Capture tasks. Ensuring the integrity of any new or updated hydraulic or coastal analyses in combination with one or more sources is paramount. Failure to submit this task when data should have been submitted is no longer an issue. The MIP redesign allows for tasks to be reopened so that data can be uploaded. If the CTP obtains floodplain mapping data that was not included in the MAS, the CTP shall contact the region to discuss the need to submit a change request to include the task and leverage as part of the award and request that this task be added to the MIP workflow.

Responsible Mapping Partner: CTP/Mapping Partner

The CTP shall perform floodplain mapping as described in *Table 28. Summary of Floodplain Mapping*. Floodplain Mapping activities include mapping and redelineation of the 1 percent and 0.2 percent annual chance event floodplains and regulatory floodways based upon updated topographic data. Floodplain Mapping may also include the digital conversion of non-revised floodplain area(s). Coastal flood sources shall also include mapping coastal static BFE zones, areas of combined coastal and riverine flooding, as well as mapping the LiMWA.

The redelineation of floodplains utilizes updated topographic data to remap the floodplain boundary based upon effective water surface elevations. Per FEMA Standard ID #104, redelineation shall only be used when the terrain source data is better than effective, and the stream reach is classified as VALID in the CNMS database. Please review SID #104 listed in the last FEMA Policy for the most current language of the standard. Prior to redelineating effective floodplain boundaries, the current CNMS database should be reviewed to assess the appropriateness of this approach. The CTP shall use the effective FIS profile, floodway data table, FIRM/Flood Hazard Boundary Map (FHBM), and, as necessary, the effective hydraulic model, to delineate floodplain boundary on updated topography.

Per FEMA Standard ID #137, redelineation of coastal flood hazard areas requires the revision of the 1-percent-annual-chance SFHA boundary, the 0.2 percent-annual-chance floodplain boundary, and the primary frontal dune delineation. Please review SID #137 listed in the last FEMA Policy for the most current language of the standard.

Digital conversion of non-revised floodplain areas is the incorporation of the effective floodplain boundary, as-is, into the digital FIRM DB. This activity involves the georeferencing of effective paper maps and digitizing the effective floodplain and floodway boundaries. Digital conversions do not revise the effective SFHA. The CTP shall incorporate the results of all effective LOMCs for all affected communities on the FIRM and provide to the appropriate PTS the required submittals for

incorporation into the National Flood Hazard Layer (NFHL). Also, the CTP shall address all concerns or questions regarding Floodplain Mapping that are raised during the independent QA/QC review.

Per FEMA Standard ID #134, if the redelineation topographic data indicates that the effective hydraulic analyses are no longer valid, further actions must be coordinated with the FEMA Regional PO and the CNMS database must be updated. Please refer to SID #134 listed in the last FEMA Policy for the most current language of the standard. The CTP shall capture flood hazard engineering and/or mapping data quality issues encountered during this activity in the CNMS database for the area(s) of interest. These issues will be entered as “Requests” or “Needs” in the CNMS requests feature dataset based on the nature of the deficiency encountered. Detailed information on performing this task can be found in the relevant standards specified in [Part 1.5. Standards](#).

2.19. Independent QA/QC: Floodplain Mapping Data Capture

Scope: The Independent QA/QC Mapping Partner shall perform an impartial review of the floodplain mapping submitted by the CTP under Floodplain Mapping to ensure that the results of the analyses performed are accurately represented, the redelineation of existing data on new, updated topography is appropriate, and to ensure that the new FIRM panels accurately represent the information shown on the effective FIRMs and Flood Boundary and Floodway Maps (FBFMs) for the unrevised areas that are mapped. FEMA may audit or assist in these activities if deemed to be necessary by the FEMA Regional PO. This work shall include, at a minimum, the activities listed below.

Please note FEMA will also be performing periodic audits and overall study/project management to ensure study quality. The CTP will be responsible for addressing any and all comments resulting from independent QC, including resubmittal of deliverables as needed to pass technical review.

- If developing Coastal Mapping:
 - Review the Summary of Stillwater Elevations and Transect Data tables for agreement with the coastal modeling results.
 - Review the coastal transects for proper location and orientation on the work maps and agreement with the Transect Descriptions table. Ensure that the transects on the work maps extend to the inland limit of the coastal modeling results used for mapping.
 - Review the Primary Frontal Dunes (PFD) and Zone VE/Zone AE boundary delineations to ensure that the PFD delineation is coincident with, or seaward of, the Zone VE/Zone AE boundary.
 - Review the LiMWA line to ensure proper placement and that the line is oriented in the right direction so that when symbolized the line points to the appropriate area where wave heights are greater than 1.5 feet.

- Review the cross-sections for proper location and orientation on the work map and agreement with the Floodway Data Table and Flood Profiles.
- Review the BFEs and coastal flood zones (both Zones VE and Zones AE) shown on the work map for proper location and agreement with the results of the coastal modeling.
- Review the regulatory floodway widths for agreement with the widths shown in the Floodway Data Table.
- For non-revised floodplain areas, the 1 percent and 0.2 percent annual chance floodplain boundaries agree with the floodplain boundaries shown on the FIRM, the contour lines, other topographic information, and planimetric information shown on the FIRM base.
- Road and floodplain relationships are maintained for all unrevised areas.
- Review the flood insurance risk zones as shown on the work maps to ensure the data are labeled properly.
- Review the FIRM mapping files to ensure the data were prepared in accordance with FEMA standards.
- Review the metadata files to ensure the data includes all required information shown in the National Flood Insurance Program (NFIP) Metadata Profiles Specification, located at <https://www.fema.gov/media-collection/flood-risk-templates-and-other-resources>.
- Review that effective LOMCs for all affected communities on the FIRM were accounted for.
- Verify that the data was submitted under the applicable GEOGRAPHIC FOOTPRINT folders.

2.20. Draft FIRM Database Capture

Note: Every MAS for a FIRM update must include this task to ensure the database used is documented and submitted for National Quality Review 1 per FEMA standards. In addition, leveraged FIRM data must be documented and submitted for this task.

Scope: The CTP shall prepare the database in accordance FEMA standards and guidance, including all relevant Technical Reference documents, for upload to the MIP. The CTP is responsible for confirming and/or obtaining any revised or updated guidance from the region. The CTP shall coordinate with the Regional Service Center (RSC) to complete and submit the Key Decision Point (KDP) 2 form prior to Quality Review (QR) 1. The CTP shall coordinate with appropriate Mapping Partners, as necessary, to resolve any problems that are identified during development of the FIRM Database.

When the BLE deliverable is selected in *Table 32. Task 21 – Produce Preliminary Map Products*, the following will be performed:

- **BLE** – As stated in section 2.15 Hydraulic Data Capture, CTPs must ensure for all BLE studies, the Hydraulics Data Capture and Draft FIRM Database tasks are created in the MIP. The Draft FIRM Database task is necessary so that BLE results may be viewed in FEMA’s draft data viewer.

2.21. Produce Preliminary Map Products

Note: CTPs may consider including and completing this task in the MIP. In addition, leveraged hydrologic data must be documented and submitted to the MIP for this task. Failure to submit this task when data should have been submitted is no longer an issue. New projects for FY2020 or newer should utilize the AMP Tool for FIRM production. The “Automated Map Production (AMP) Best Practices” guidance is located at https://hazards.fema.gov/femaportal/usercare/guidesAndDocs/Documents/AMP_Best_Practices.pdf. The MIP redesign will allow for tasks to be reopened and data can be uploaded.

Scope: The AMP will apply the final FEMA FIRM graphic and database specifications to the FIRM files produced under Floodplain Mapping for the panels identified in *Table 31. FIRM Panel Summary*. This work shall include adding all required annotation, line pattern, area shading, and map collar information (e.g., map borders, title blocks, legends, and notes to user). The CTP shall coordinate with those entities responsible for Floodplain Mapping and/or Redelineation, as necessary, to resolve any problems that are identified during development of the FIRM Database and graphics. The CTP shall follow all Database specifications and ensure the product is generated as expected. The Best Practice Guidance for AMP is located at https://hazards.fema.gov/femaportal/usercare/guidesAndDocs/Documents/AMP_Best_Practices.pdf. The CTP shall prepare a Preliminary SOMA for each affected community, if appropriate. The CNMS Regional File Geodatabase is to reflect changes to the existing inventory applicable to scoped studies, study extents and attributes.

2.22. Independent QA/QC: Produce Preliminary Map Products

Scope: Upon completion of the floodplain mapping and re-delineation activities, the Independent QA/QC Mapping Partner shall perform an impartial review of the FIRM spatial database to determine if it meets current FEMA database specifications. The CTP shall coordinate with other entities, as necessary, to resolve any problems identified during this QA/QC review. FEMA may audit or assist in these activities if deemed to be necessary by the FEMA Regional PO.

Please note FEMA will also be performing periodic audits and overall study/project management to ensure study quality. The CTP will be responsible for addressing any and all comments resulting from independent QC, including resubmittal of deliverables as needed to pass technical review.

This work shall ensure that the requirements below are met.

- Preliminary FIRM database is in a GIS file and database format as specified in FEMA standards, and conform to those specifications for content and attribution.

- FIRM database files are in one of the database formats specified in FEMA standards, and conform to those specifications for content and attribution.
- Assess risk assessment products for compliance with FEMA standards if applicable.
- Review and affirm that Preliminary SOMAs were accurately created for applicable communities.
- Perform any needed updates to the CNMS database for the project area of interest.
- Confirm updated, cleaned, CNMS linework reflect status updates due to scope changes that might have occurred during production and are updated to “Being Studied” where applicable.
- Confirm presence of any supporting documentation for new validation status in CNMS.
- Confirm an updated requests layer is present and contains requests made during production or discovered as part of the study process.

2.23. Distribute Preliminary Map Products

Scope: The Distribute Preliminary Map Products¹¹ task consists of the final preparation, review, and distribution of the preliminary copies of the FIRM and FIS report, and the preliminary SOMA and Risk Assessment products to community officials and the general public for review and comment. The CTP shall prepare and submit the KDP3 required documentation to be reviewed and approved at the FEMA Regional level. Preliminary distribution cannot begin until this process is approved. FEMA may audit or assist in these activities if deemed to be necessary by the FEMA Regional PO. The activities to be performed are summarized below.

- *Preliminary Transmittal Letter Preparation* – The CTP shall prepare letters and transmit the Preliminary copies of the FIRM and FIS report and related enclosures to all affected communities, all other Project Team members, the State NFIP Coordinator, the FEMA Regional Office, and others as directed by FEMA. This letter may be prepared using the national or regional template with FEMA letterhead/logo and with FEMA signature only, or (when pre-approved by the Regional Office) on FEMA and CTP joint letterhead for signature by FEMA and the CTP.
- *Distribution of Preliminary Package* – The CTP shall distribute the Preliminary copies of the FIRM and FIS report, Preliminary SOMA (as applicable) and Risk Assessment products (as applicable) to all affected communities, all other Project Team members, the State NFIP Coordinator, the FEMA Regional Office, and others as directed by FEMA.

¹¹ Refer to MIP task names as needed. Validation tasks need to be created in MIP. Note that FEMA's designee will be assigned this task, not the CTP and/or as part of the general guidance to projects. Tasks CTPs must know about include: Produce, Distribute, Independent QA/QC. The others are PTS provider tasks.

2.24. Post-Preliminary Map Production

Scope: The Post-Preliminary activity consists of completing the statutory, regulatory and administrative activities required to finalize the FIRM and FIS report after the Preliminary copies of the FIRM and FIS report have been issued to community officials and the public for review and comment. FEMA may audit or assist in these activities as necessary. The activities to be performed are summarized below. In addition, additional Stakeholder Engagement tasks and the Final (CCO) Meeting and Public Meeting are held during this time, as described in the Risk MAP Meetings Section of the Perform Community Engagement and Project Outreach task.

- *News Release Preparation* – The CTP shall use the MIP in accordance with FEMA standards to create Expanded Appeals Process (EAP) notices for studies that result in new or modified BFEs or base flood depths and/or new or modified flood hazard information, including additions or modifications of any SFHA boundary, SFHA zone designation, or regulatory floodway within a community. FEMA, or its designee, shall perform QA/QC reviews of the Flood Hazard Determination (FHD) information for accuracy and compliance with FEMA format requirements.
- *Initiation of Statutory 90-Day Appeal Period* – When required, upon completion of a 30-day community comment period and/or final coordination meeting with the affected communities, the following activities are completed in accordance with the current version of the FEMA standards, and appropriate guidance:
 - The CTP shall prepare and submit the KDP4 required documentation to be reviewed and approved at the FEMA Regional level. FHD notice publication cannot begin until this process is approved.
 - The CTP shall meet with the FEMA Regional Office of External Affairs, other FEMA staff, community officials, to discuss the mapping project and at a minimum provide a local Public Service Announcement (PSA) statement to local radio and television outlets to further educate property owners about appeals processes.
 - The CTP shall prepare and submit the FEDD file to FEMA, or its designee, for interim review #1. The FEDD file check is required to pass prior to the proposed flood hazard notice being submitted for publication.
 - The CTP shall prepare and deliver to FEMA, or its designee, the appropriate flood hazard determination notice(s) information via the MIP to be published in the Federal Register. FEMA standards and guidance shall be followed.
 - The CTP shall send proposed FHD notification letters and verify confirmation of receipt to meet FEMA standards and guidance, using the Appeal Start template to the community Chief Executive Officers (CEOs) and floodplain administrators.
 - The CTP shall ensure that news release notifications of Proposed FHD changes are published in prominent newspapers in accordance with 44 CFR Part 67.4. Additional outreach may be

achieved through the community's official social media outreach (e.g. Facebook, Twitter) with local newspaper circulation.

FEMA, or its designee, shall perform QA/QC reviews of the *Federal Register* notice information submitted through the MIP, community notification letters and news release notifications for accuracy and compliance with FEMA format requirements. FEMA, or its designee, shall create and route the Federal Register notice once QA/QC of the submitted information has been completed.

- *Resolution of Appeals and Comments*¹² – The CTP shall review and provide relevant information for FEMA to resolve appeals and comments received during the 90-day appeal period in accordance with FEMA standards. For each appeal and comment, the following activities shall be conducted as appropriate:
 - Prepare and mail (or email) acknowledgment letter on FEMA letterhead with FEMA signature following FEMA concurrence.
 - Perform technical review of submitted information.
 - Prepare interim communication letter(s) requesting additional supporting data, as needed. Any additional data requested and accepted outside the 90-day appeal period will be subject to the running of another appeal period. Only data submitted, asked for, and received during the actual 90-day regulatory appeals window can be considered for resolution without needing a subsequent appeal period.
 - Perform revised analyses, if necessary, upon FEMA direction.
 - Prepare a draft resolution letter for appeals and comments, on FEMA letterhead for FEMA signature, and (as necessary) revised FIRM and FIS report materials for FEMA review.
 - Mail resolution letter(s) upon FEMA concurrence.
 - Update CNMS as appropriate when resolving appeals/comments.
 - Complete self-certification of compliance with FEMA's Floodplain Boundary Standards within 30 days of the issuance of a study's Letter of Final Determination (LFD) if the floodplain boundaries have been modified during the post-preliminary processing/appeals resolution process.
 - Update the Risk Assessment Suite as needed (and directed by FEMA) for appeal resolutions.

¹² PPP is broken out into "Due Process," "Final Map Production and Distribution," and "Outreach." This would mean that the tables with a single PPP row need to be further broken out with multiple costs and schedules.

- The CTP shall prepare all associated correspondence using FEMA letterhead and mail upon authorization by FEMA. When approved by FEMA, appeal and comment correspondence may be on joint FEMA-CTP letterhead and co-signed by FEMA and the CTP.

Note: Collaboration and coordination with appellants/communities is the statutory responsibility of FEMA and cannot be entirely delegated. As such, all appeal-related correspondence must be on FEMA letterhead (or occasionally on joint FEMA-CTP letterhead, when approved by FEMA) and must direct official requests and data submissions to FEMA. Appeal-related correspondence may not be distributed on CTP-only letterhead or on CTP contractor letterhead.

- *Preparation of Special Correspondence* – The CTP shall, at the request of FEMA, respond to comments not received within the 90-day appeal period and before the maps are effective (referred to as “special correspondence”) including drafting responses for FEMA review and finalizing responses for signature. The CTP shall mail the final correspondence (and enclosures, if appropriate) and distribute appropriate copies of the correspondence and enclosures upon authorization from FEMA. The CTP shall prepare all associated correspondence using FEMA letterhead and mail upon authorization by FEMA. When approved by FEMA, correspondence may be on joint FEMA-CTP letterhead and co-signed by FEMA and the CTP.
- *Revision and Finalization of FIRM and FIS Report* – If necessary, the CTP shall coordinate with FEMA to determine the appropriate level of effort to revise the FIRM and FIS report and shall distribute revised Preliminary copies of the FIRM and FIS report to the CEO and floodplain administrator of each affected community, all other Project Team members, the State NFIP Coordinator, the FEMA Regional Office, and others as directed by FEMA. The CTP shall finalize the FIRM and FIS, including incorporating effective Letters of Map Revision, in accordance with FEMA standards and guidance, and upload final products to the MIP for automated and visual National QRs (QR5 and QR7) in accordance with FEMA standards. All work must pass appropriate QRs prior to issuance of the LFD.
- *Processing of LFD* – The CTP shall prepare and submit the FEDD Files for Interim Review #2. Once the FEDD Files has passed review, the CTP shall prepare and submit the KDP5 required documentation to be reviewed and approved at both the FEMA Regional and FEMA Headquarters levels. QRs 5, 6, 7 and processing of the LFD cannot begin until this process is approved at all levels. The CTP should follow the regional submittal guidelines on all KDP5 packages as each region has their own processes set up to review this documentation. The CTP shall work with FEMA to establish the effective date for the FIRM and FIS report and shall prepare LFDs for affected communities. The CTP shall submit the Final Mapping Products and LFD Package for Quality Reviews 5, 6, and 7 per FEMA guidance and standards, in coordination with the Region and its designated contractor. FEMA, or its designated contractor, shall mail the final signed LFDs and enclosures, including Final SOMAs, and distribute appropriate copies of the signed LFDs and Final SOMAs. FEMA’s Customer and Data Services (CDS) contractor shall address all automated and visual National QRs (Quality Review 5 and Quality Review 7) comments and the

CTP will be responsible for obtaining a pass on the QR of the LFD package (Quality Review 6) prior to the distribution of the LFD letters.

- *Final SOMA Preparation* – The CTP shall prepare Final SOMAs for the affected communities with assistance from FEMA, or its designee, as appropriate. The products must pass QR6 prior to issuance of the LFD letters.
- *Final FHD Notice* – Typically, the Final FHD Notice to be published in the Federal Register is generated from the Proposed Notice. The CTP shall prepare an appropriate final notice and deliver to FEMA, or its designee, for review and publication. The product must pass QR6 prior to issuance of the LFD letters.
- *Processing of Final FIRM and FIS Report for Printing* – The CTP shall prepare final reproduction materials for the FIRM (developed from the FEMA AMP tool) and FIS report and provide these materials to FEMA, or its designee, in accordance with FEMA standards and guidance for printing by the Map Service Center (MSC); please refer to the [“Data Capture Technical Reference”](#) document. The CTP shall also prepare the appropriate paperwork to accompany the FIRM and FIS report and transmittal letters to the community CEOs. The CTP will submit a DVT compliant FIRM DB that will be used with FEMA’s AMP tool to produce FIRM panels. FEMA’s CDS contractor will be responsible to address any QR7 and QR8 in accordance with FEMA standards and guidance. The products must pass QR7 prior to issuance of the LFD letters.
- *Revalidation Letter Processing* – The CTP shall prepare and distribute letters for FEMA signature to the community CEOs and floodplain administrators to notify the affected communities about Letters of Map Change for which determinations will remain in effect after the FIRM and FIS report become effective. The CTP shall update the MIP SOMA tool as necessary to prepare and submit the Revalidation Letters to FEMA, or its designee, for review and approval prior to distributing the letters to communities. The Revalidation Letters must be submitted for review 4–5 weeks prior to the effective date. The CTP shall mail Revalidation Letters to communities one week before the effective date, following review completion and FEMA approval. After distribution of the revalidation letters, the CTP shall send copies of the official dated letters to FEMA, or its designee, for submittal to the LOMC subscription service.
- *Archiving Data* – The CTP shall ensure that technical and administrative support data are packaged in the FEMA required format and stored properly in the library archives until transmitted to the FEMA Engineering Study Data Package Facility. In addition, the CTP will maintain copies of all data for a period of no less than three years from the submission of the Final Report for award management.
- *MIP* – The CTP shall complete all necessary PPP MIP tasks and purchases in accordance with FEMA Standards and requirements.

Authorized Representative Signatures

Each party has caused this MAS to be executed by its duly authorized representative.



08/26/2022

Glenn Heistand
Project Manager
Illinois State Water Survey

Date

John Wethington
Regional Project Officer
Federal Emergency Management Agency, Region 5

Date

Julia McCarthy
Mitigation Division Deputy Director
Federal Emergency Management Agency, Region 5

Date

Mary Beth Caruso
Mitigation Division Director
Federal Emergency Management Agency, Region 5

Date

List of Tables

Table 1. Project and Point of Contact Information	2
Table 2. Narrative and Audience.....	3
Table 3. Flood Risk Project Watersheds and Jurisdictions.....	4
Table 4. Total Stream or Shoreline Mile, or 2D Square Mile Counts by Type of Study	4
Table 5. Task 1 – Project Management and Earned Value Data Entry.....	8
Table 6. Task 2 – Discovery Data Capture	9
Table 7. Task 3 – Event Data Capture	10
Table 8. Task 4 – Project Outreach and Communication Plan	12
Table 9. Task 5 – Flood Risk Products Data Capture.....	14
Table 10. Task 6 – Independent QA/QC of Flood Risk Products	15
Table 11. Task 7 – Survey Data Capture	17
Table 12. Task 8 – Existing or New Topographic Data Capture and Terrain Data Capture	18
Table 13. Summary of Topographic Elevation Data	19
Table 14. Task 9 – Independent QA/QC: Topographic Data Capture	20
Table 15. Task 10 – Base Map Data Capture.....	21
Table 16. Summary of Planned Base Map (if known).....	21
Table 17. Task 11 – Independent QA/QC: Base Map Data Capture.....	23
Table 18. Task 12 – Hydrology Data Capture	24
Table 19. Summary of Hydrologic Analyses	24
Table 20. Task 13 – Independent QA/QC: Hydrology Data Capture	26
Table 21. Task 14 – Hydraulics Data Capture	27
Table 22. Summary of Hydraulic Analyses	28
Table 23. Task 15 – Independent QA/QC: Hydraulics Data Capture	29
Table 24. Task 16 – Coastal Data Capture.....	31
Table 25. Summary of Coastal Data	31
Table 26. Task 17 – Independent QA/QC: Coastal Data Capture.....	33
Table 27. Task 18 – Floodplain Mapping Data Capture	34
Table 28. Summary of Floodplain Mapping	35
Table 29. Task 19 – Independent QA/QC: Floodplain Mapping Data Capture	36

Table 30. Task 20 – Draft FIRM Database Capture.....	37
Table 31. FIRM Panel Summary.....	38
Table 32. Task 21 – Produce Preliminary Map Products.....	39
Table 33. Task 22 – Independent QA/QC: Produce Preliminary Map Products.....	40
Table 34. Task 23 – Distribute Preliminary Map Products	41
Table 35. Task 24 – Post-Preliminary Map Production.....	42
Table 36. Levee System Data in Study Area	43
Table 37. Performance Measures Targets.....	44
Table 38. Project Risk Identification and Mitigation	45
Table 39. Use of Contractors.....	49
Table 40. TSDN Section Mapping Activities	51
Table 41. Flood Risk Products.....	69
Table 42. Hydraulic Analysis Options for Base and Enhanced Level Engineering	76

Acronyms

AMP	Automated Map Production
ASPRS	American Society for Photogrammetry and Remote Sensing
BFE	Base Flood Elevation
BLE	Base Level Engineering
CAP	Corrective Action Plan
CCO	Consultation Coordination Officer
CDS	Customer and Data Services
CEO	Chief Executive Officer
CFR	Code of Federal Regulations
CNMS	Coordinated Needs Management Strategy
COMS	Community Outreach and Mitigation Strategies
CPI	Cost Performance Index

CSLF	Changes Since Last FIRM
CTP	Cooperating Technical Partner
DB	Database
DFIRM	Digital Flood Insurance Rate Map
DVT	Database Validation Tool
EAP	Expanded Appeals Process
FAQs	Frequently Asked Questions
FAR	Federal Acquisition Regulation
FBFM	Flood Boundary and Floodway Map
FEDD	Flood Elevation Determination Docket
FEMA	Federal Emergency Management Agency
FHBM	Flood Hazard Boundary Map
FHD	Flood Hazard Determination
FIRM	Flood Insurance Rate Map
FIS	Flood Insurance Study
FRP	Flood Risk Project
FRR	Flood Risk Report
GDC	Geospatial Data Coordination
GIS	Geographic Information System
KDP	Key Decision Point
LAMP	Levee Analysis and Mapping Procedures
LFD	Letter of Final Determination
LiDAR	Light Detection and Ranging
LiMWA	Limit of Moderate Wave Action

LOMC	Letter of Map Change
LULC	Land Use Land Cover
MAS	Mapping Activity Statement
MIP	Mapping Information Platform
MSC	Map Service Center
NFHL	National Flood Hazard Layer
NFIP	National Flood Insurance Program
NOFO	Notice of Funding Opportunity
PFD	Primary Frontal Dunes
PII	Personally Identifiable Information
PMT	Project Management Team
PO	Project Officer
POCP	Project Outreach and Communication Plan
PSA	Public Service Announcement
PTS	Production and Technical Services
QA	Quality Assurance
QC	Quality Control
QMP	Quality Management Plan
QR	Quality Review
RAMSAR	Risk Analysis Management Access Request
RSC	Regional Service Center
SFHA	Special Flood Hazard Area
SID	Standard Identification
SOMA	Summary of Map Actions

SOW	Statement of Work
SPI	Schedule Performance Index
SPR	Special Problem Report
USGS	United States Geological Survey